






**BETA 110** 3-cylinder, high pressure, high volume diaphragm pumps are constructed of anodized aluminum, brass and stainless steel and have anodized aluminum, brass and stainless steel liquid handling parts. Includes mounting rails and control unit with pressure gauge. Simplicity of design and common parts allow for easy and economical maintenance.

**BETA 110** pumps are excellent choices for various horticultural and agricultural spraying applications.

BETA 110 TS2C

Model	GPM	I/min	PSI	bar	RPM	Drive Configuration	Weight	List Price
BETA 110 TS2C	34.0	128.0	725	50	550	1-3/8" 6-Spline Male PTO Thru-Shaft	120 LBS	\$ 4,207.55

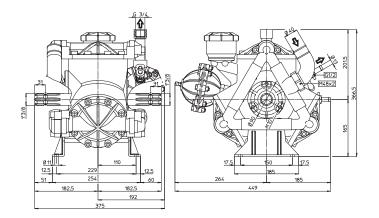

Dimensional Drawings are Shown in Millimeters. To Convert to Inches, Multiply Dimension x 0.03937

Specifications	BETA 110
Inlet Port	1-1/2" Hose Barb
Outlet Ports	(3) 3/4" Hose Barb
Bypass	1" Hose Barb
Dimensions	16.8"L x 14.9"W x 17.2"H
Diaphragm Material	GREENTECH (Standard)

**Lubrication**: Requires 81 oz. of Udor Lube 40W Premium Pump Oil. Alternate Oil: 30W non-detergent or 15W-40 non-detergent oil.

## **QUICK REFERENCE SERVICE PARTS**

Description	Part #	List Price
Diaphragm Kit (GREENTECH)	8700.06	\$ 187.77
Diaphragm Bolt / Washer Kit	6062.60	\$ 124.70
Valve Kit	6062.D9	\$ 281.40
Regulator Repair Kit	8701.03	\$ 111.96
Complete Repair Kit	8700.06CK	\$ 532.10

## **Recommended Accessories and Drive Options**



**1219.15**Shaft Protector and Mounting Bolts



**1219.02** PTO Drive Safety Shield



**6005.05** Control Unit Regulator



Venturi Agitator 1/2" MNPT Inlet



1-1/2" HI-Flow Filter 16 Mesh Screen



15.5823 Udor Lube Premium Pump Oil