

Scan this QR Code
for more information




DELTA 100 4-cylinder, medium pressure diaphragm pumps are internally manifolded with anodized aluminum construction and anodized aluminum and stainless steel liquid handling parts. Includes mounting rails and 6047.06 control unit with pressure gauge.

DELTA 100 pumps are excellent choices for various horticultural, agricultural, lawn care, nursery, pest control and turf spraying applications. They are also effectively used for aircraft de-icing, hydrostatic testing and cleaning applications.



DELTA 100 1C



DELTA 100 VA



DELTA 100 VAGR1




DELTA 100 TS2C



DELTA 100 TSVA

Model	GPM	l/min	PSI	bar	RPM	Drive Configuration	Weight
DELTA 100 1C	26.0	104.0	560	40	550	1-3/8" 6-Spline Male PTO Shaft	51 LBS
DELTA 100 VA	26.0	104.0	560	40	550	Universal VA Drive Face. Mounting Rails	51 LBS
DELTA 100 VAGR1	26.0	104.0	560	40	550	Gear Reduction for 1" Shaft Gas Engine, 8-20 HP	51 LBS
DELTA 100 TS2C	26.0	104.0	560	40	550	1-3/8" 6-Spline Male PTO Thru-Shaft	72 LBS
DELTA 100 TSVA	26.0	104.0	560	40	550	Universal VA Drive Face x 1-3/8" 6-Spline Male PTO	51 LBS

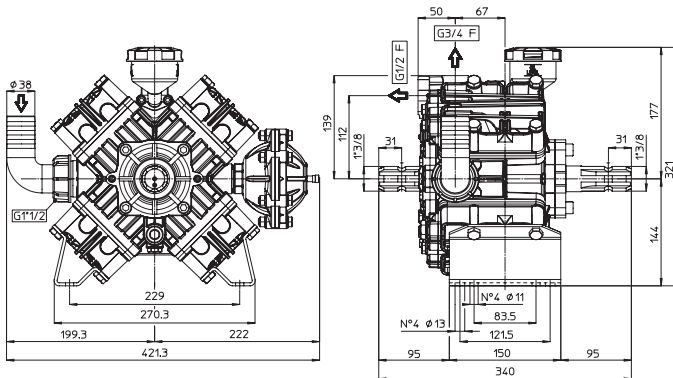

Dimensional Drawings are
Shown in Millimeters.
To Convert to Inches,
Multiply Dimension x 0.03937

Specifications

DELTA 100

Inlet Port	1-1/2" Hose Barb
Outlet Ports	(2) 3/4" Hose Barb,
Bypass	1" Hose Barb
Dimensions	13.5"L x 17.0"W x 13.0"H
Diaphragm Material	GREENTECH (Std) Buna-N (Opt)

Lubrication: Requires 40 oz. of Udor Lube 40W Premium Pump Oil.
Alternate Oil: 30W non-detergent or 15W-40 non-detergent oil.

QUICK REFERENCE SERVICE PARTS

Description	Part #
Diaphragm Kit (GREENTECH)	8700.80
Diaphragm Bolt / Washer Kit	6062.12
Valve Kit	6062.E5
Regulator Repair Kit	6062.53
Complete Repair Kit	8700.80CK

Recommended Accessories and Drive Options



6047.06
Control Unit
Regulator - 560 PSI



5034.B5
Gear Reduction
1" Shaft Gas Engine



6066.05
PTO Drive
Safety Shield



7751.A3
1" Solid Keyed
Shaft and Bolts



7753.A6
1-1/8" Male PTO
Shaft and Bolts



15.5823
Udor Lube
Premium Pump Oil