

DELTA 140

UDOR
USA



Scan this QR Code
for more information




DELTA 140 3-cylinder, high pressure diaphragm pumps are internally manifolded with anodized aluminum construction and anodized aluminum and stainless steel liquid handling parts. Includes mounting rails and 6005.05 control unit with pressure gauge.

DELTA 140 pumps are excellent choices for various horticultural, agricultural, lawn care, nursery, pest control and turf spraying applications. They are also effectively used for aircraft de-icing, hydrostatic testing and cleaning applications.



DELTA 140 TS2C


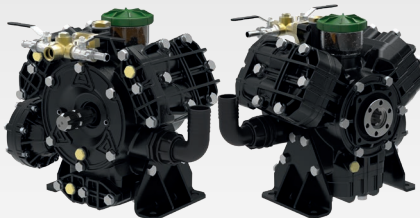


DELTA 140 TSMFVA



DELTA 140 GR1

Model	GPM	l/min	PSI	bar	RPM	Drive Configuration	Weight
DELTA 140 TS2C	36.4	138.0	725	49	550	1-3/8" 6-Spline Male PTO Thru-Shaft	95 LBS
DELTA 140 TSMFVA	36.4	138.0	725	49	550	1-3/8" 6-Spline Male PTO x Universal VA Face	95 LBS
DELTA 140 GR1	36.4	138.0	725	49	550	Gear Reduction for Gas Engines with 1" Shaft, 8-20 HP	115 LBS

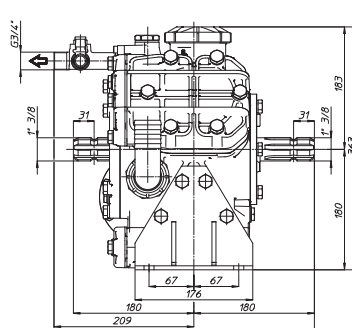

Dimensional Drawings are
Shown in Millimeters.
To Convert to Inches,
Multiply Dimension x 0.03937

Specifications

DELTA 140

Inlet Port	1-1/2" Hose Barb
Outlet Ports	(2) 1/2" Hose Barb
Bypass	1" Hose Barb
Dimensions	19.0"L x 15.5"W x 14.5"H
Diaphragm Material	GREENTECH (Std) Buna-N (Opt)

Lubrication: Requires 54 oz. of Udor Lube 40W Premium Pump Oil.
Alternate Oil: 30W non-detergent or 15W-40 non-detergent oil.

QUICK REFERENCE SERVICE PARTS

Description	Part #
Diaphragm Kit (GREENTECH)	6062.H5
Diaphragm Bolt / Washer Kit	6062.16
Valve Kit	6062.H6
Regulator Repair Kit	6062.53
Complete Repair Kit	8700.83CK

Recommended Accessories and Drive Options



6005.05
Control Unit
Regulator



5034.B5
Gear Reduction
1" Shaft Gas Engine



6066.09
Shaft Protector
and Mounting Bolts



UD1-1/2-16
1-1/2" HI-Flow Filter
16 Mesh Screen



7753.A6
1-1/8" Male PTO
Shaft and Bolts



15.5823
Udor Lube
Premium Pump Oil