



Scan this QR Code  
for more information




**DELTA 40** 2-cylinder, medium pressure diaphragm pumps are internally manifolded with anodized aluminum construction and anodized aluminum and stainless steel liquid handling parts.


**DELTA 40** pumps are excellent choices for various horticultural, agricultural, lawn care, nursery, pest control and turf spraying applications. They are also effectively used for aircraft de-icing, hydrostatic testing and cleaning applications.



**DELTA 40**




**DELTA 40 TSFVA**



**DELTA 40 GR3/4**

Model	GPM	l/min	PSI	bar	RPM	Drive Configuration	Weight
<b>DELTA 40</b>	10.5	40.0	560	40	550	25 mm Solid Keyed Shaft. Mounting Rails	29 LBS
<b>DELTA 40 TSFVA</b>	10.5	40.0	560	40	550	25 mm Solid Keyed Shaft x Universal VA Drive Face. Mounting Rails	29 LBS
<b>DELTA 40 GR3/4</b>	10.5	40.0	560	40	550	Gear Reduction for 3/4" Shaft Gas Engine, 4-6.5 HP	39 LBS

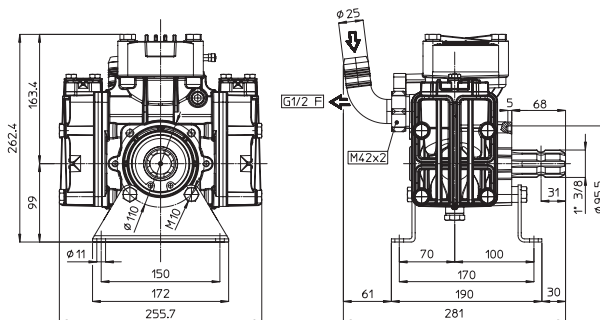

Dimensional Drawings are  
Shown in Millimeters.  
To Convert to Inches,  
Multiply Dimension x 0.03937

## Specifications

## DELTA 40

Inlet Port	1" Hose Barb
Outlet Ports	(2) 1/2" Hose Barb
Bypass	3/4" Hose Barb
Dimensions	10.5"L x 11.5"W x 10.5"H
Diaphragm Material	GREENTECH (Std) Buna-N (Opt)

**Lubrication:** Requires 20 oz. of Udor Lube 40W Premium Pump Oil.  
Alternate Oil: 30W non-detergent or 15W-40 non-detergent oil.

## QUICK REFERENCE SERVICE PARTS

Description	Part #
Diaphragm Kit (GREENTECH)	6062.G4
Diaphragm Bolt / Washer Kit	6062.B4
Valve Kit	6062.G3
Regulator Repair Kit	6062.A9
Complete Repair Kit	8700.85CK

## Recommended Accessories and Drive Options



**6010.24**  
Control Unit  
Regulator w/Gauge



**5071.75**  
Gear Reduction  
3/4" Shaft Gas Engine



**0016.04**  
Venturi Agitator  
1/2" MNPT Inlet



**163.604.4**  
**163.604.6**  
3/8" & 1/2" HB Elbow



**UD1-16**  
1" HI-Flow Filter  
16 Mesh Screen



**15.5823**  
Udor Lube  
Premium Pump Oil