



26.901.400 (Turbo Industrial)


High Performance Adjustable Spray Gun

Maximum Flow

15.0 GPM / 57 lpm

Maximum Pressure

850 PSI / 58 bar

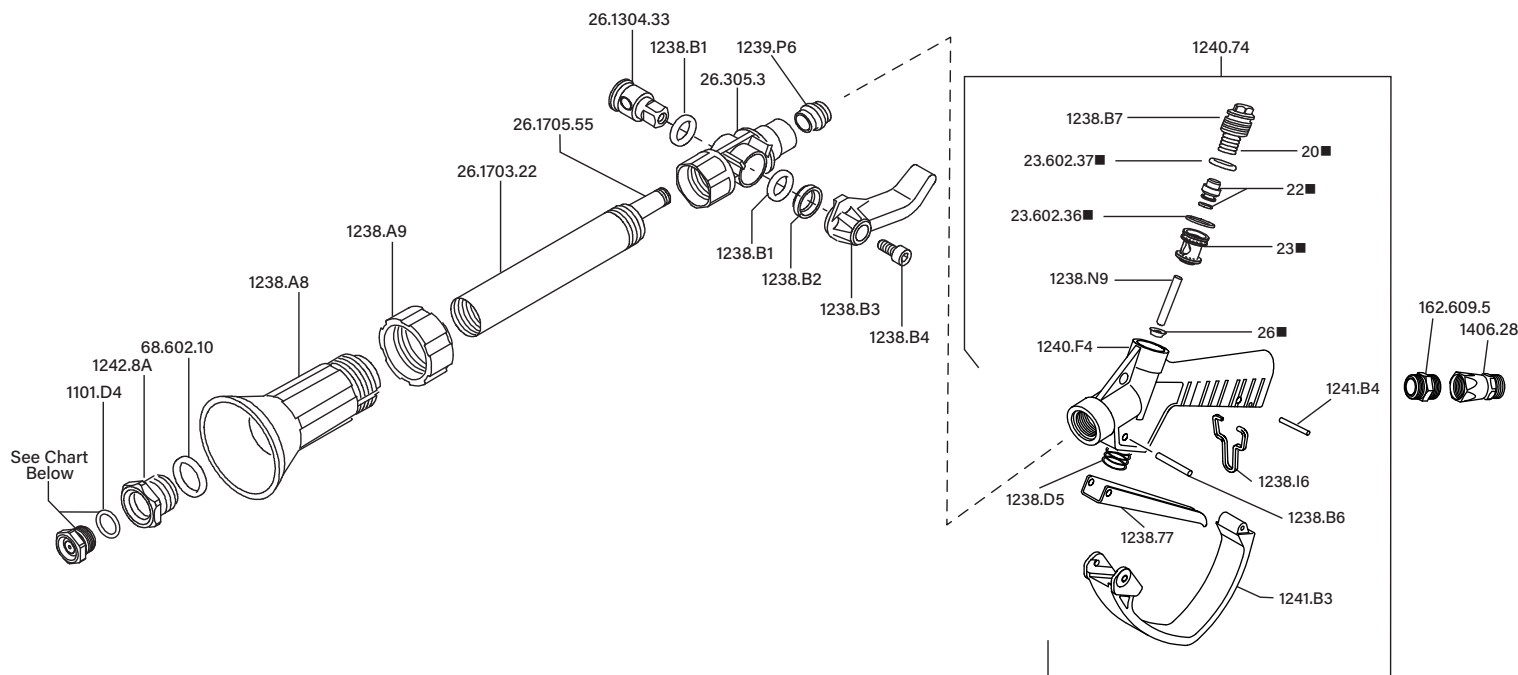

Revised 2-2-2026

Part #	Description	Qty
See Chart	Spray Tip	1
162.609.5	Inlet Fitting Adapter	1
23.602.36 ■	O-Ring	1
23.602.37 ■	O-Ring	1
26.1304.33	Regulator	1
26.1703.22	Outer Tube	1
26.305.3	Body	1
68.602.10	O-Ring	1
1101.D4	O-Ring - Nozzle	1
1238.77	Trigger	1
1238.A8	Nozzle Protector	1
1238.A9	Nut	1
1238.B1	O-Ring	2
1238.B2	Spacer	1
1238.B3	Adjustment Lever	1
1238.B4	Bolt	1
1238.B6	Trigger Pin	1
1238.B7	Plug	1

Part #	Description	Qty
1238.D5	Spring	1
1238.F2	Inner Tube	1
1238.I6	Trigger clip	1
1238.N9	Plunger	1
1239.P6	Insert Guide	1
1240.74	Trigger Gun	1
1240.F4	Gun Body	1
1241.B3	Trigger Guard	1
1241.B4	Pin	1
1242.8A	Nozzle Retainer	1
1406.28	Inlet Adapter	1
20 ■	Spring	1
22 ■	Poppet Assy	1
23 ■	Seat	1
26 ■	Seal	1
8711.08	Repair Kit	

■ Parts Included in Repair Kit 8711.08

Spray Tip Performance Chart

Model	Orifice (mm)	Material	Gallons per Minute / Maximum Spray Distance in Feet				
			100 PSI	200 PSI	400 PSI	600 PSI	800 PSI
1701.30	1.5	Ceramic	.78 / 17	1.1 / 20	1.5 / 23	1.8 / 25	2.1 / 27
1701.53	1.8	Ceramic	1.1 / 19	1.6 / 21	2.3 / 24	2.6 / 26	2.9 / 28
1701.31	2.0	Ceramic	1.4 / 21	2.0 / 24	2.8 / 26	3.4 / 29	3.8 / 32
1701.32	2.3	Ceramic	2.0 / 24	2.5 / 29	4.0 / 34	5.0 / 42	5.5 / 45
1701.33	2.5	Ceramic	2.5 / 23	3.0 / 28	4.5 / 32	5.5 / 40	6.5 / 44
1701.26	3.0	Ceramic	3.0 / 28	4.5 / 29	6.5 / 34	8.0 / 41	9.0 / 44
1701.45	3.5	S/S	4.5 / 31	6.0 / 36	8.5 / 41	11.0 / 50	12.0 / 54
1701.34	4.0	S/S	5.0 / 35	7.5 / 38	10.0 / 43	13.5 / 53	14.5 / 59
1701.46	4.5	S/S	6.5 / 37	9.0 / 39	12.5 / 44	16.5 / 54	18.0 / 62
1701.44	5.0	S/S	7.5 / 33	10.0 / 41	14.0 / 47	18.5 / 59	21.0 / 67
1701.47	5.5	S/S	8.0 / 35	11.5 / 42	16.0 / 47	21.0 / 59	23.0 / 70
1701.48	6.0	S/S	9.0 / 38	12.5 / 44	18.0 / 54	23.0 / 66	26.0 / 74
1701.43	7.0	S/S	9.5 / 21	13.5 / 47	19.0 / 57	24.0 / 70	27.0 / 77