

Gear Reduction, Gas Engine Models

1" or 1-1/8" Hollow Shaft, SAE J609-B Flange

2.2:1 Gear Reduction Drive



- Solid Ceramic Plungers
- Stainless Steel Check Valves
- Heavy Duty Brass Manifold with External and Internal Bracing
- High Strength Aluminum Alloy Connecting Rods.
- Large Diameter Brass Valve Caps with Increased Thread Depth
- Reinforcing Ring on Inlet and Discharge Ports
- Deeper Back Cover for Increased Oil Capacity
- 34.5 oz. Capacity Vented Oil Bath Crank Case
- 3/4" BSP-F Inlet. 3/8" BSP-F Outlet: 5.5 - 8.5 GPM
- 3/4" BSP-F Inlet. 1/2" BSP-F Outlet: 9.0 GPM & Above
- Max Fluid Temp, 160°F
- Standard with 1" Hollow Shaft
- Available with 1-1/8" Hollow Shaft.
Add '1-1/8' to Model Number to Specify when Ordering

CC Series 24mm Keyed Solid Shaft Plunger Pumps

CC Series standard duty plunger pumps include a wide range of models with flow rates from 5.5 to 18.5 GPM and pressures up to 2900 PSI.

Other drive options include 24mm solid shaft and hydraulic motor flange.

Applications include general pressure cleaning, sewer jetting, vehicle wash equipment, street cleaning, construction, hydro-excavation and UHP fire fighting applications.

	Model	Flow		Pressure		Plunger Dia.	Crankshaft		Power	Seal Kit	Valve Kit	Wt.
		GPM	l/min	PSI	bar		Stroke	Code				
Gear Reduction	CC 21/20 GR	5.5	21.0	2900	200	22mm	13.5mm	N	14.5 HP Gas	6061.10	6061.03	36 lbs
	CC 26/20 GR	6.9	26.0	2900	200	22mm	17.0mm	X	16.0 HP Gas	6061.10	6061.03	36 lbs
	CC 30/20 GR	7.9	30.0	2900	200	25mm	15.0mm	V	20.0 HP Gas	6061.11	6061.03	36 lbs
	CC 34/20 GR	9.0	34.0	2900	200	25mm	17.0mm	X	23.0 HP Gas	6061.11	6061.03	36 lbs
	CC 38/17 GR	10.0	38.0	2465	170	28mm	15.0mm	V	20.0 HP Gas	6061.12	6061.03	36 lbs
	CC 42/17 GR	11.6	44.0	2465	170	28mm	17.0mm	X	23.0 HP Gas	6061.12	6061.03	36 lbs
	CC 50/15 GR	13.2	50.0	2175	150	28mm	19.0mm	Y	23.0 HP Gas	6061.12	6061.03	36 lbs
	CC 70/15 GR	18.5	70.0	2175	150	30mm	24.0mm	2	35.0 HP Gas	6072.02	6072.26	36 lbs


NOTE: All models available with 1" or 1-1/8" Hollow Shafts. Specify size when ordering (ex. **CC 21/20 GR1** or **CC 21/20 GR1-1/8.**)



MAX FLOW
MAX PRESSURE
RATED PUMP SPEED
POWER REQUIREMENT
LUBRICATION

11.6 GPM / 44.0 L/MIN
2465 PSI / 170 BAR
1450 RPM
23.0 HP GAS
34.5 OZ UDOR LUBE

34.5 OZ UDOR LUBE

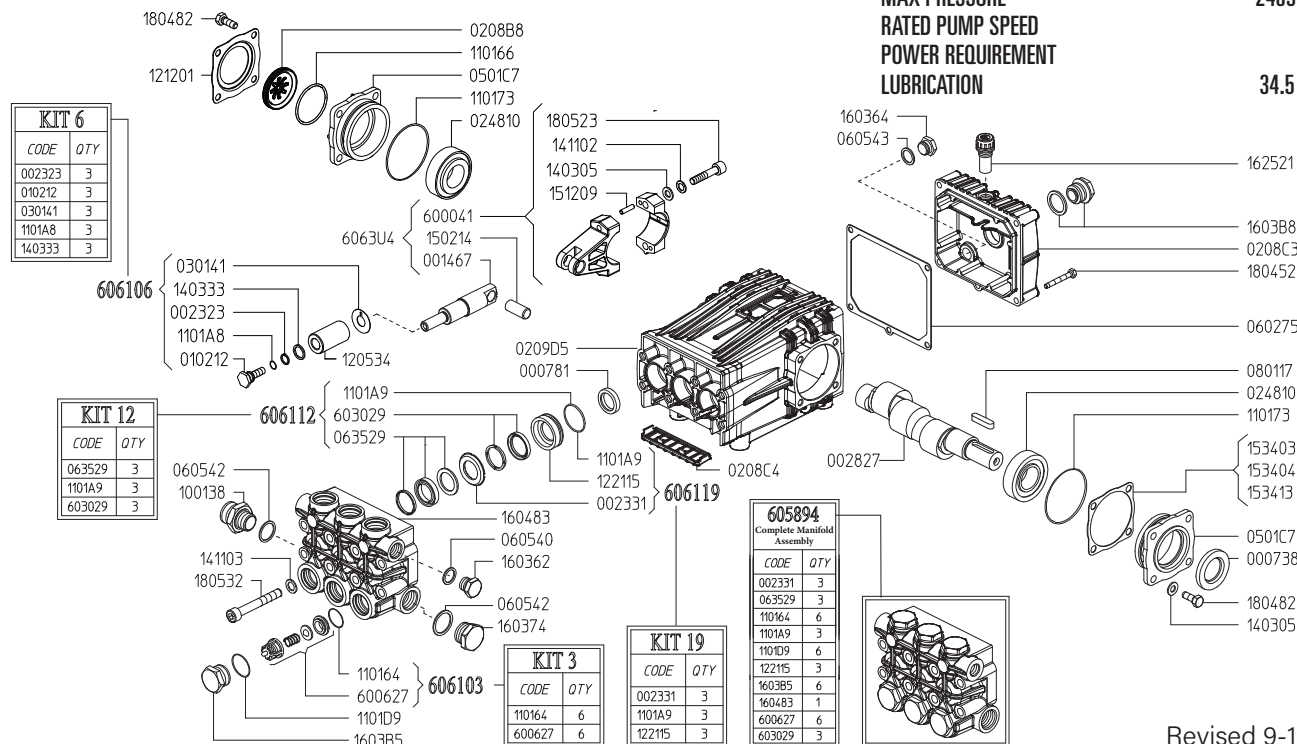

Revised 9-15-2025

Part #	Description	Qty
0007.38	OIL SEAL D30	1
0007.81	OIL SEAL D20	3
0014.67	PLUNGER GUIDE D22/25/28 "C/CK"	3
0023.23	RING D10.4 ^B	3
0023.31	UPPER RING D28 ^{D E}	3
0028.27	MALE SHAFT D24	1
0102.12	PLUNGER BOLT ^B	3
0208.B8	OIL SIGHT GLASS	1
0208.C3	BACK COVER "C/CK"	1
0208.C4	COVER "C/CK"	1
0209.D5	CRANKCASE "C/CK/CH"	1
0248.10	ROLLER BEARING D30	2
0301.41	SLINGER RING ^B	3
0501.C7	BEARING HOLLOW FLANGE	2
0602.75	BACK COVER GASKET	1
0605.40	GASKET D21.5	1
0605.42	GASKET D27	2
0605.43	GASKET D17	1
0635.29	HIGH PRESSURE SEAL KIT D28 ^{C E}	3
0801.17	KEY A8X7X35	1
1001.38	NIPPLE G3/4 M - G1" M	1
1101.64	O-RING - VALVE ^{A E}	6
1101.66	O-RING - OIL SIGHT GLASS	1
1101.73	O-RING - BEARING FLANGE	2
1101.A8	O-RING - PLUNGER BOLT ^B	3
1101.A9	O-RING - PRESSURE RING ^{C D E}	3
1101.D9	O-RING - VALVE PLUG ^E	6
1205.34	CERAMIC PLUNGER D28	3
1212.01	RETAINER - OIL SIGHT GLASS	1
1221.15	PRESSURE RING D28 ^{D E}	3
1403.05	WASHER D8.4	10

Part #	Description	Qty
1403.33	WASHER D13.4 ^B	3
1411.02	SERATED WASHER D8	6
1411.03	SERATED WAHSER D10	8
1502.14	PIN D14X32	3
1512.09	PLUG D5X20 UNI1707	6
1534.03	SHIM 0.1 MM	1
1534.04	SHIM 0.2 MM	1
1534.13	SHIM 0.05 MM	1
1603.62	PLUG G1/2	2
1603.74	PLUG G3/4	1
1603.B5	VALVE PLUG PISTON D28 ^E	6
1603.B8	OIL PLUG G3/4" + GASKET	1
1604.83	HEAD "C/G" PISTON D28 ^E	1
1625.21	OIL PLUG G3/8	1
1804.52	HEX BOLT M6X45	5
1804.82	HEX BOLT M8X22	8
1805.23	ALLEN BOLT M8X40	6
1805.32	ALLEN BOLT M10X75	8
6000.41	ROD ASSEMBLY	3
6006.27	VALVE ASSEMBLY W/O O-RING ^{A E}	6
6030.29	LOW PRESSURE SEAL ASSY D28 ^{C E}	3
6058.94	COMPLETE MANIFOLD ASSEMBLY	1
6061.03	KIT 3 VALVE KIT	1
6061.06	KIT 6 PLUNGER KIT	1
6061.12	KIT 12 WATER SEAL KIT D28 "C/CK"	1
6061.19	KIT 19 BRASS RING KIT D28 "C/CK/NX"	1

^A Parts in 6061.03 (Kit 3).


^B Parts in 6061.06 (Kit 6).

^c Parts in 6061.12 (Kit 12).

^D Parts in 6061.19 (Kit 19).

^E Parts in 6058.94 (Complete Manifold Assembly).

**GAS ENGINE GEAR REDUCTION FOR
 B/BK/BS/BWT/C/CS/CWT/CK/CX-SERIES PLUNGER PUMPS
 on GAS ENGINES with 1" SHAFTS
 REQUIRES 11.5 OZ. ISO VG 220 GEAR LUBE**

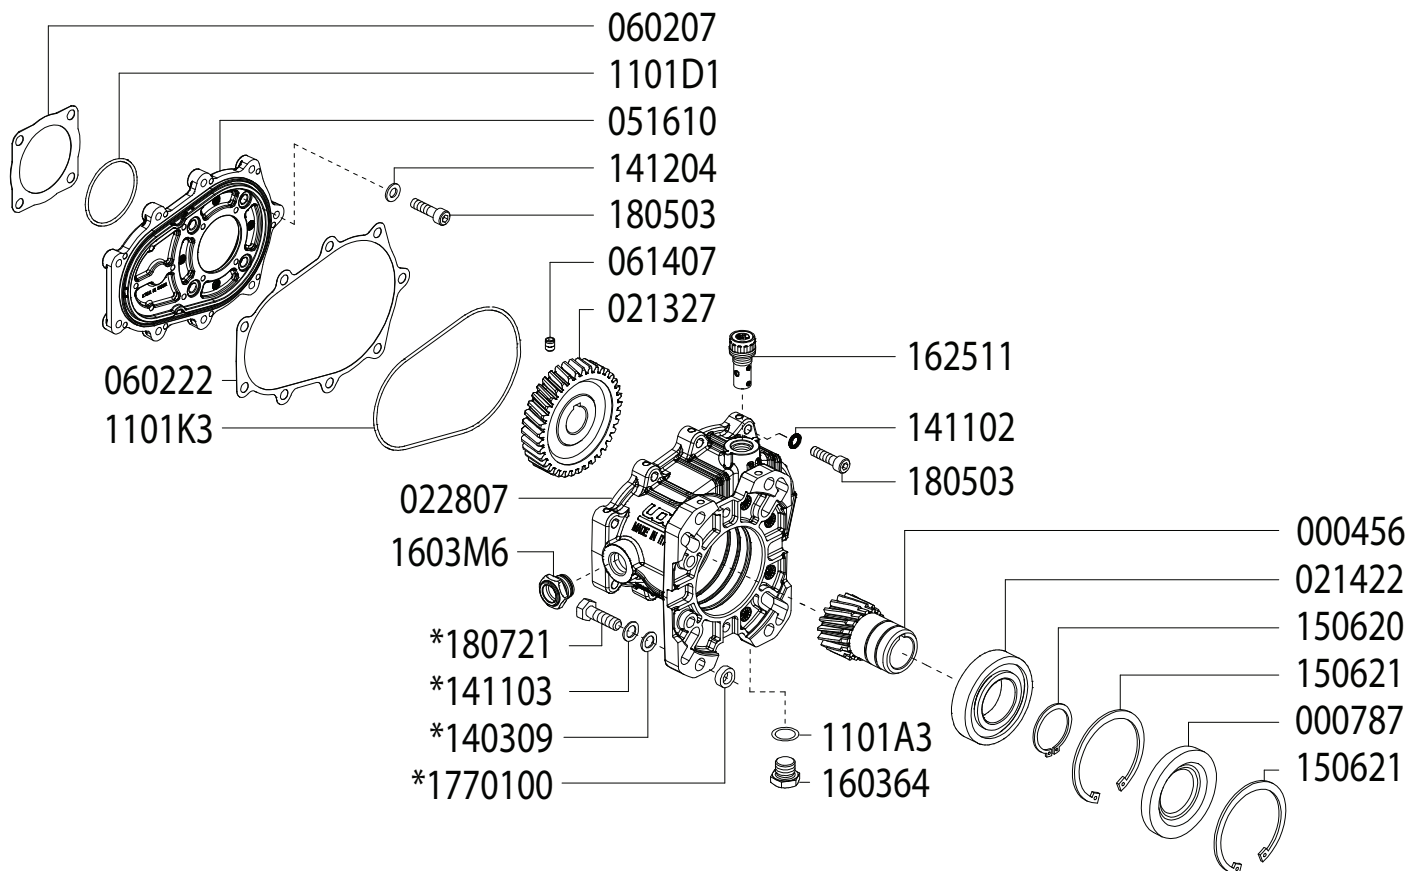


Updated 9-15-2025

Part #	Description	Qty
0004.56	GEAR - 1"	1
0007.87	OIL SEAL - D40 - RBC122K	1
0213.27	PUMP GEAR	1
0214.22	BEARING - D40 - RBC122K	1
0228.07	COUPLER - RBC122	1
0516.10	FLANGE - RBC122	1
0602.07	GASKET - RC122	1
0602.22	GASKET - RBC122 HOUSING	1
0614.07	SET SCREW - M5X8	1
1101.A3	O-RING	1
1101.D1	O-RING	1
1101.K3	O-RING	1
*1403.09	WASHER	4

Part #	Description	Qty
1411.02	WASHER	9
*1411.03	SERRATED WASHER	4
1412.04	WASHER	4
1506.20	SNAP RING - D40	1
1506.21	SNAP RING - D80	2
1603.64	PLUG - 3/8"	1
1603.M6	OIL SIGHT GLASS	1
1625.11	OIL PLUG - G3/8"	1
1805.03	ALLEN BOLT - M8x30	13
*1807.21	HEX BOLT - 3/8-16 X 1-1/4"	5
*17701.00	SPACER	4

* For use when using outer mounting holes only

**GAS ENGINE GEAR REDUCTION FOR
 B/BK/BS/BWT/C/CS/CWT/CK/CX-SERIES PLUNGER PUMPS
 on GAS ENGINES with 1-1/8" SHAFTS
 REQUIRES 11.5 OZ. ISO VG 220 GEAR LUBE**

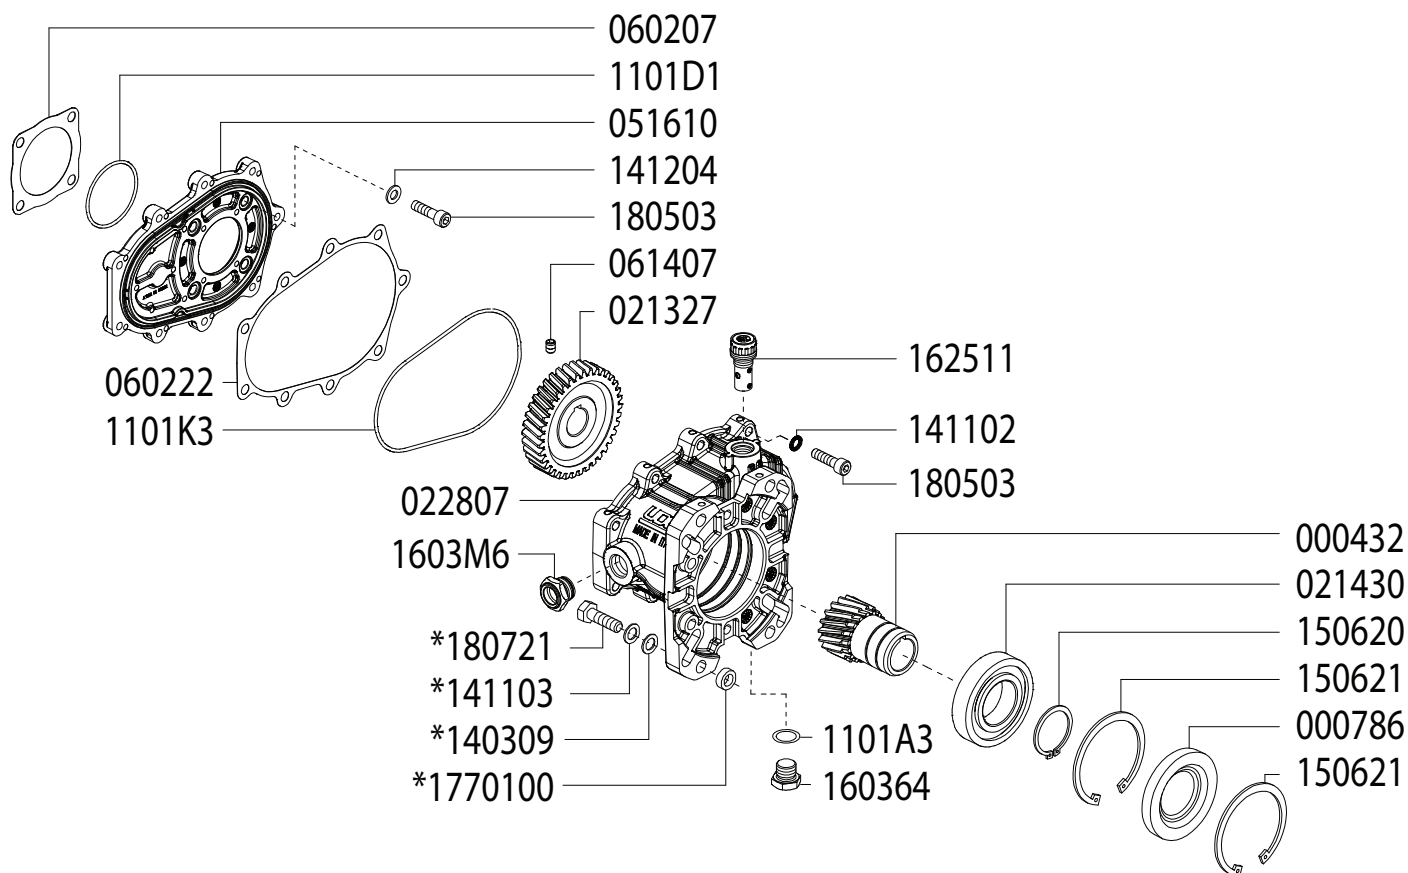

Updated 9-15-2025



Part #	Description	Qty
0004.32	GEAR - 1-1/8"	1
0007.86	OIL SEAL - D40 - RBC122X	1
0213.27	PUMP GEAR	1
0214.30	BEARING - D40 - RBC122X	1
0228.07	COUPLER - RBC122	1
0516.10	FLANGE - RBC122	1
0602.07	GASKET - RC122	1
0602.22	GASKET - RBC122 HOUSING	1
0614.07	SET SCREW - M5X8	1
1101.A3	O-RING	1
1101.D1	O-RING	1
1101.K3	O-RING	1
*1403.09	WASHER	4

Part #	Description	Qty
1411.02	WASHER	9
*1411.03	SERRATED WASHER	4
1412.04	WASHER	4
1506.20	SNAP RING - D40	1
1506.21	SNAP RING - D80	2
1603.64	PLUG - 3/8"	1
1603.M6	OIL SIGHT GLASS	1
1625.11	OIL PLUG - G3/8"	1
1805.03	ALLEN BOLT - M8x30	13
*1807.21	HEX BOLT - 3/8-16 X 1-1/4"	5
*17701.00	SPACER	4

* For use when using outer mounting holes only

*Dimensional Drawings are
Shown in Millimeters.
To Convert to Inches,
Multiply Dimension x 0.03937*

C SERIES PUMPS 9 GPM & OVER

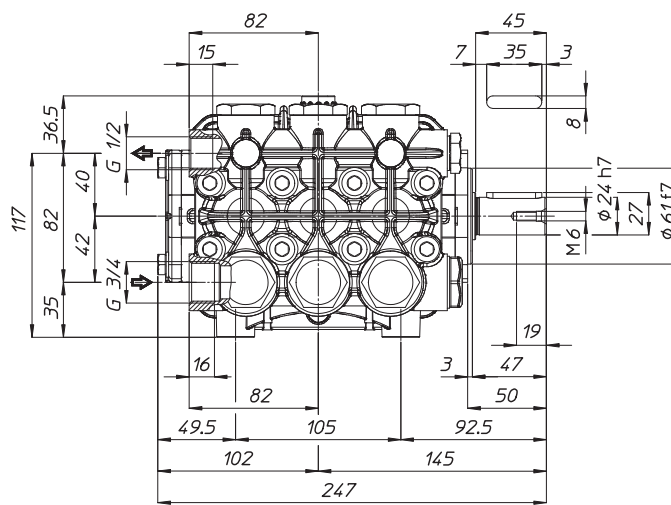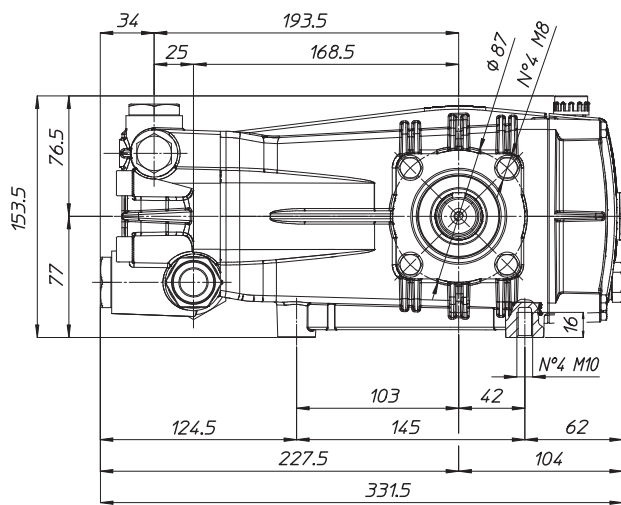

TORQUE SPECS

Ref.	Description	Ft./lb.	Nm	Loctite®
1	Head Bolts	37	50	-
2	Valve Caps	103	140	243
3	Inlet Cap	103	140	-
4	Outlet Cap	103	140	243
5	Bearing Flange Bolts	19	25	-
6	Rear Cover Bolts	8	11	-
7	Connecting Rod Bolts	19	25	270
8	Plunger Bolts	15	20	270
9	Valve Cover Bolts	-	-	-
10	Oil Drain Plug	8	11	-

