

Gear Reduction, Gas Engine Models

1" or 1-1/8" Hollow Shaft, SAE J609-B Flange

2.2:1 Gear Reduction Drive



- Solid Ceramic Plungers
- Stainless Steel Check Valves
- Heavy Duty Brass Manifold with External and Internal Bracing
- High Strength Aluminum Alloy Connecting Rods.
- Large Diameter Brass Valve Caps with Increased Thread Depth
- Reinforcing Ring on Inlet and Discharge Ports
- Deeper Back Cover for Increased Oil Capacity
- 34.5 oz. Capacity Vented Oil Bath Crank Case
- 3/4" BSP-F Inlet. 3/8" BSP-F Outlet: 5.5 - 8.5 GPM
- 3/4" BSP-F Inlet. 1/2" BSP-F Outlet: 9.0 GPM & Above
- Max Fluid Temp, 160°F
- Standard with 1" Hollow Shaft
- Available with 1-1/8" Hollow Shaft. Add '1-1/8' to Model Number to Specify when Ordering

CC Series 24mm Keyed Solid Shaft Plunger Pumps

CC Series standard duty plunger pumps include a wide range of models with flow rates from 5.5 to 18.5 GPM and pressures up to 2900 PSI.

Other drive options include 24mm solid shaft and hydraulic motor flange.

Applications include general pressure cleaning, sewer jetting, vehicle wash equipment, street cleaning, construction, hydro-excavation and UHP fire fighting applications.


	Model	Flow		Pressure		Plunger Dia.	Crankshaft		Power	Seal Kit	Valve Kit	Wt.
		GPM	l/min	PSI	bar		Stroke	Code				
Gear Reduction	CC 21/20 GR	5.5	21.0	2900	200	22mm	13.5mm	N	14.5 HP Gas	6061.10	6061.03	36 lbs
	CC 26/20 GR	6.9	26.0	2900	200	22mm	17.0mm	X	16.0 HP Gas	6061.10	6061.03	36 lbs
	CC 30/20 GR	7.9	30.0	2900	200	25mm	15.0mm	V	20.0 HP Gas	6061.11	6061.03	36 lbs
	CC 34/20 GR	9.0	34.0	2900	200	25mm	17.0mm	X	23.0 HP Gas	6061.11	6061.03	36 lbs
	CC 38/17 GR	10.0	38.0	2465	170	28mm	15.0mm	V	20.0 HP Gas	6061.12	6061.03	36 lbs
	CC 42/17 GR	11.6	44.0	2465	170	28mm	17.0mm	X	23.0 HP Gas	6061.12	6061.03	36 lbs
	CC 50/15 GR	13.2	50.0	2175	150	28mm	19.0mm	Y	23.0 HP Gas	6061.12	6061.03	36 lbs
	CC 70/15 GR	18.5	70.0	2175	150	30mm	24.0mm	2	35.0 HP Gas	6072.02	6072.26	36 lbs

NOTE: All models available with 1" or 1-1/8" Hollow Shafts. Specify size when ordering (ex. CC 21/20 GR1 or CC 21/20 GR1-1/8.)



MAX FLOW
MAX PRESSURE
RATED PUMP SPEED
POWER REQUIREMENT
LUBRICATION

13.2 GPM / 50.0 L/MIN
2175 PSI / 150 BAR
1450 RPM
23.0 HP GAS
34.5 OZ UDOR LUBE

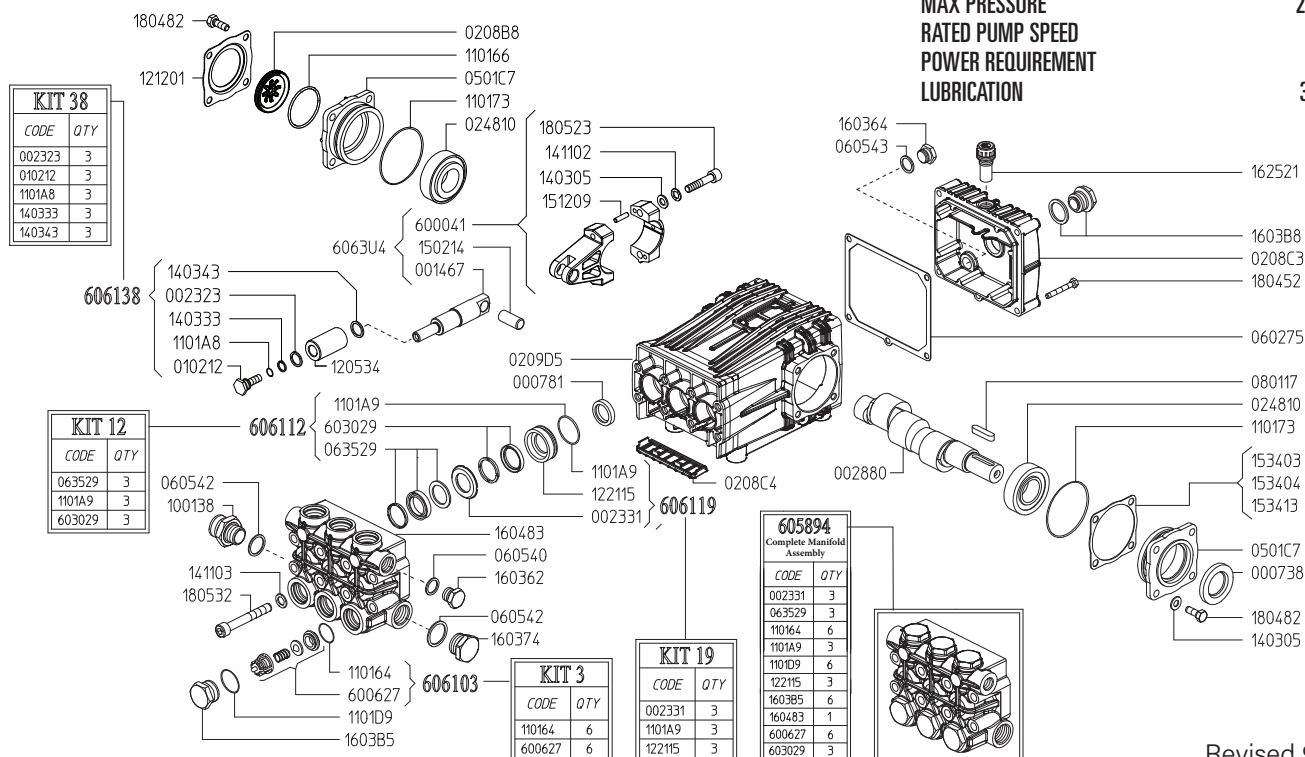

Revised 9-15-2025

Part #	Description	Qty	Part #	Description	Qty
0007.38	OIL SEAL D30	1	1403.43	WASHER D13.2 ^B	3
0007.81	OIL SEAL D20	3	1411.02	SERATED WASHER D8	6
0014.67	PLUNGER GUIDE D22/25/28 "C/CK"	3	1411.03	SERATED WAHSER D10	8
0023.23	RING D10.4 ^B	3	1502.14	PIN D14X32	3
0023.31	UPPER RING D28 ^{D E}	3	1512.09	PLUG D5X20 UNI1707	6
0028.80	MALE SHAFT D24	1	1534.03	SHIM 0.1 MM	1
0102.12	PLUNGER BOLT ^B	3	1534.04	SHIM 0.2 MM	1
0208.B8	OIL SIGHT GLASS	1	1534.13	SHIM 0.05 MM	1
0208.C3	BACK COVER "C/CK"	1	1603.62	PLUG G1/2	2
0208.C4	COVER "C/CK"	1	1603.74	PLUG G3/4	1
0209.D5	CRANKCASE "C/CK/CH"	1	1603.B5	VALVE PLUG PISTON D28 ^E	6
0248.10	ROLLER BEARING D30	2	1603.B8	OIL PLUG G3/4" + GASKET	1
0501.C7	BEARING HOLLOW FLANGE	2	1604.83	HEAD "C/G" PISTON D28 ^E	1
0602.75	BACK COVER GASKET	1	1625.21	OIL PLUG G3/8	1
0605.40	GASKET D21.5	1	1804.52	HEX BOLT M6X45	5
0605.42	GASKET D27	2	1804.82	HEX BOLT M8X22	8
0605.43	GASKET D17	1	1805.23	ALLEN BOLT M8X40	6
0635.29	HIGH PRESSURE SEAL KIT D28 ^{C E}	3	1805.32	ALLEN BOLT M10X75	8
0801.17	KEY A8X7X35	1	6000.41	ROD ASSEMBLY	3
1001.38	NIPPLE G3/4 M - 1" M	1	6006.27	VALVE ASSEMBLY W/O O-RING ^{A E}	6
1101.64	O-RING - VALVE ^{A E}	6	6030.29	LOW PRESSURE SEAL ASSY D28 ^{C E}	3
1101.66	O-RING - OIL SIGHT GLASS	1	6058.94	COMPLETE MANIFOLD ASSEMBLY	1
1101.73	O-RING - BEARING FLANGE	2	6061.03	KIT 3 VALVE KIT	1
1101.A8	O-RING - PLUNGER BOLT ^B	3	6061.12	KIT 12 WATER SEAL KIT D28 "C/CK"	1
1101.A9	O-RING - PRESSURE RING ^{C D E}	3	6061.19	KIT 19 BRASS RING KIT D28 "C/CK/NX"	1
1101.D9	O-RING - VALVE PLUG ^E	6	6061.38	KIT 38 PLUNGER KIT	1
1205.34	CERAMIC PLUNGER D28	3			
1212.01	RETAINER - OIL SIGHT GLASS	1			
1221.15	PRESSURE RING D28 ^{D E}	3			
1403.05	WASHER D8.4	10			
1403.33	WASHER D13.4 ^B	3			

^A Parts in 6061.03 (Kit 3).

^B Parts in 6061.38 (Kit 38).

^C Parts in 6061.12 (Kit 12).

^D Parts in 6061.19 (Kit 19).

^E Parts in 6058.94 (Complete Manifold Assembly).

^A Parts in 6061.03 (Kit 3).


^B Parts in 6061.38 (Kit 38).

^c Parts in 6061.12 (Kit 12).

^D Parts in 6061.19 (Kit 19).

^E Parts in 6058.94 (Complete Manifold Assembly).

**GAS ENGINE GEAR REDUCTION FOR
 B/BK/BS/BWT/C/CS/CWT/CK/CX-SERIES PLUNGER PUMPS
 on GAS ENGINES with 1" SHAFTS
 REQUIRES 11.5 OZ. ISO VG 220 GEAR LUBE**

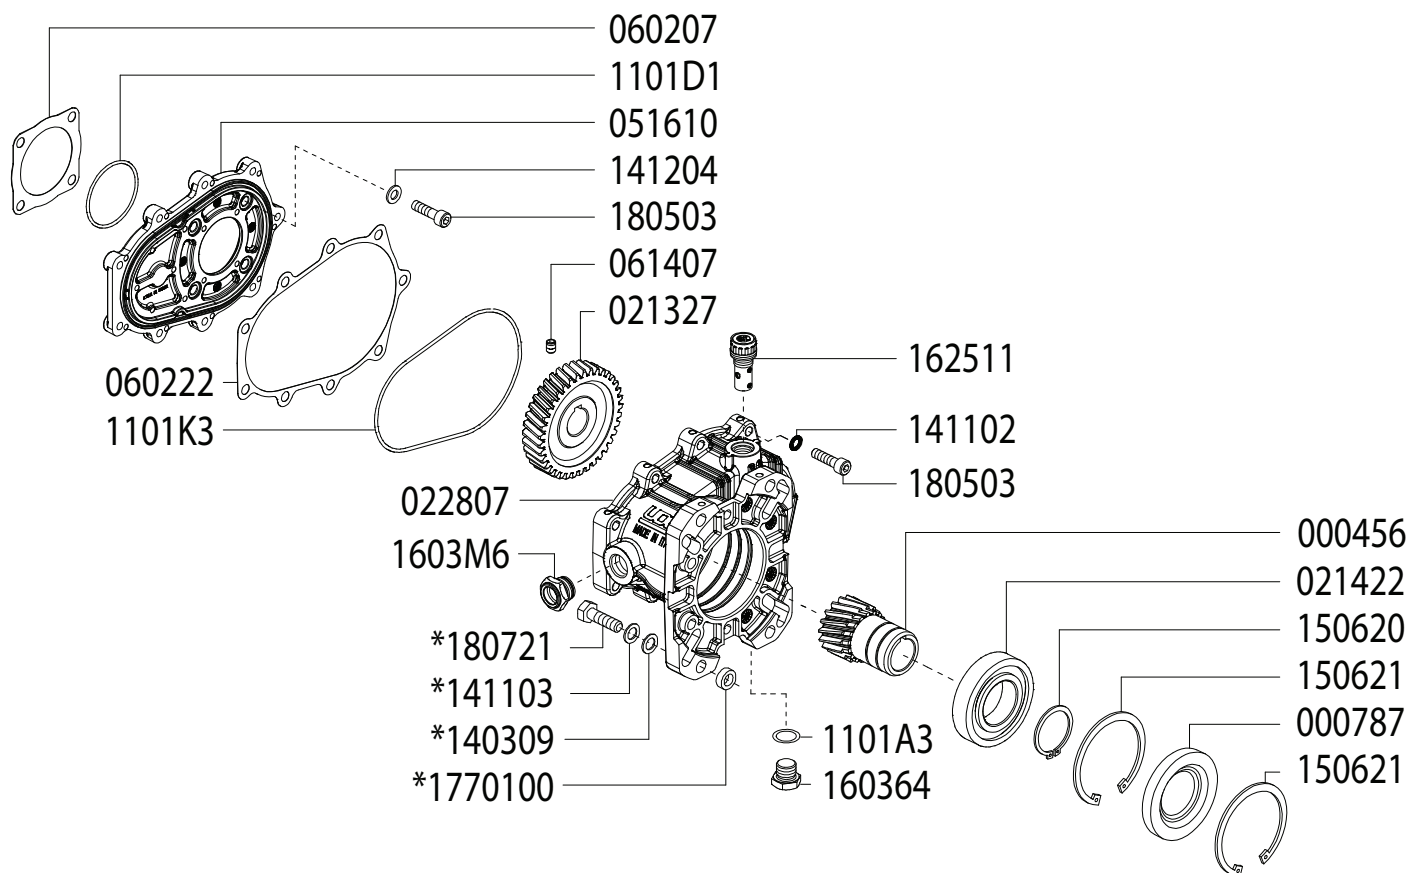


Updated 9-15-2025

Part #	Description	Qty	Part #	Description	Qty
0004.56	GEAR - 1"	1	1411.02	WASHER	9
0007.87	OIL SEAL - D40 - RBC122K	1	*1411.03	SERRATED WASHER	4
0213.27	PUMP GEAR	1	1412.04	WASHER	4
0214.22	BEARING - D40 - RBC122K	1	1506.20	SNAP RING - D40	1
0228.07	COUPLER - RBC122	1	1506.21	SNAP RING - D80	2
0516.10	FLANGE - RBC122	1	1603.64	PLUG - 3/8"	1
0602.07	GASKET - RC122	1	1603.M6	OIL SIGNT GLASS	1
0602.22	GASKET - RBC122 HOUSING	1	1625.11	OIL PLUG - G3/8"	1
0614.07	SET SCREW - M5X8	1	1805.03	ALLEN BOLT - M8x30	13
1101.A3	O-RING	1	*1807.21	HEX BOLT - 3/8-16 X 1-1/4"	5
1101.D1	O-RING	1	*17701.00	SPACER	4
1101.K3	O-RING	1			
*1403.09	WASHER	4			

* For use when using outer mounting holes only

**GAS ENGINE GEAR REDUCTION FOR
 B/BK/BS/BWT/C/CS/CWT/CK/CX-SERIES PLUNGER PUMPS
 on GAS ENGINES with 1-1/8" SHAFTS
 REQUIRES 11.5 OZ. ISO VG 220 GEAR LUBE**

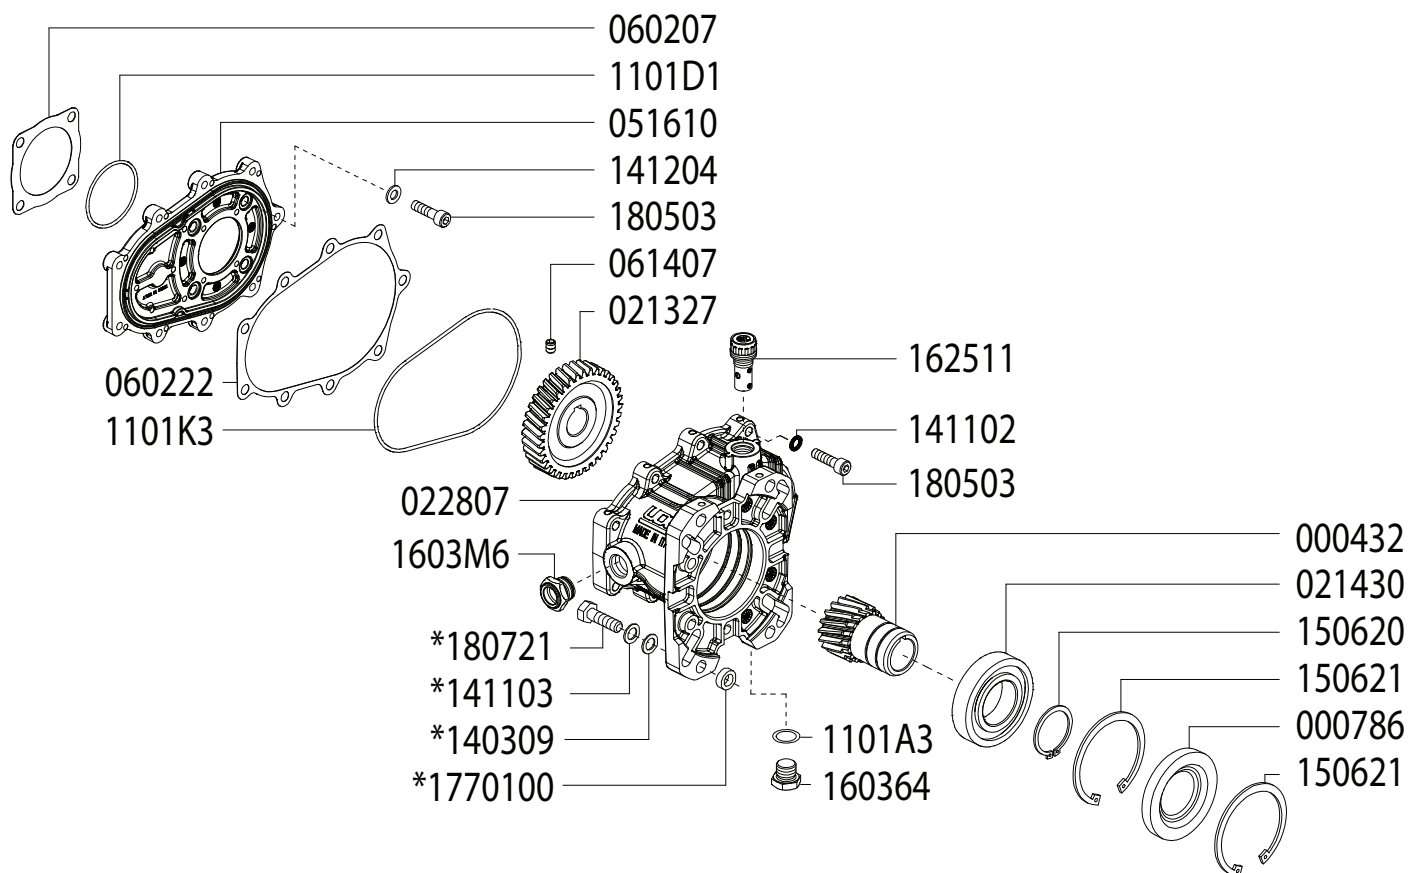

Updated 9-15-2025



Part #	Description	Qty
0004.32	GEAR - 1-1/8"	1
0007.86	OIL SEAL - D40 - RBC122X	1
0213.27	PUMP GEAR	1
0214.30	BEARING - D40 - RBC122X	1
0228.07	COUPLER - RBC122	1
0516.10	FLANGE - RBC122	1
0602.07	GASKET - RC122	1
0602.22	GASKET - RBC122 HOUSING	1
0614.07	SET SCREW - M5X8	1
1101.A3	O-RING	1
1101.D1	O-RING	1
1101.K3	O-RING	1
*1403.09	WASHER	4

Part #	Description	Qty
1411.02	WASHER	9
*1411.03	SERRATED WASHER	4
1412.04	WASHER	4
1506.20	SNAP RING - D40	1
1506.21	SNAP RING - D80	2
1603.64	PLUG - 3/8"	1
1603.M6	OIL SIGHT GLASS	1
1625.11	OIL PLUG - G3/8"	1
1805.03	ALLEN BOLT - M8x30	13
*1807.21	HEX BOLT - 3/8-16 X 1-1/4"	5
*17701.00	SPACER	4

* For use when using outer mounting holes only

*Dimensional Drawings are
Shown in Millimeters.
To Convert to Inches,
Multiply Dimension x 0.03937*

C SERIES PUMPS 9 GPM & OVER

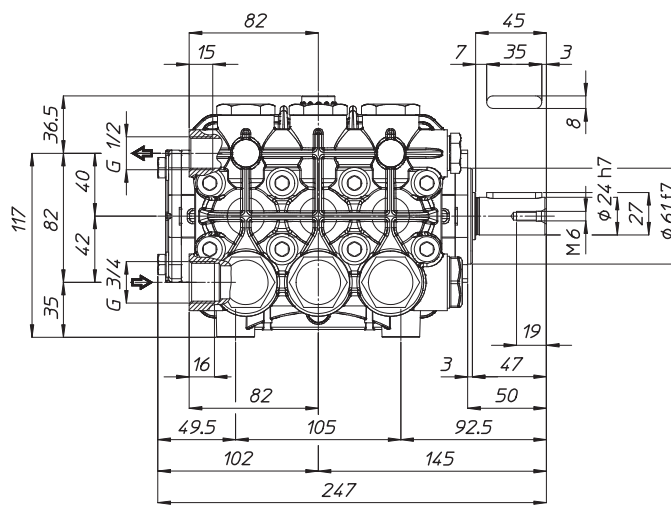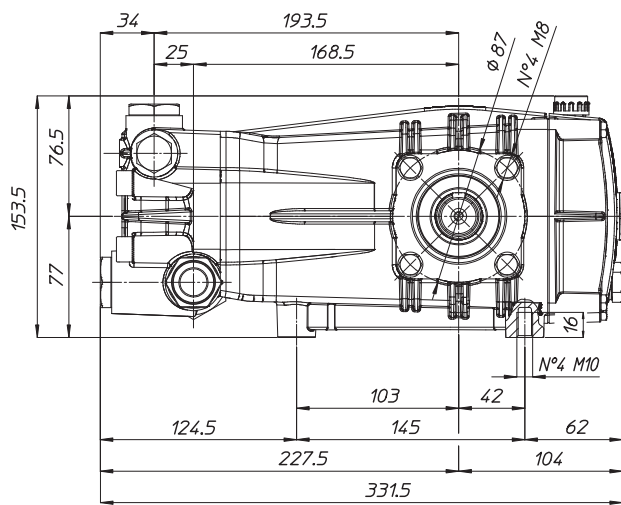

TORQUE SPECS

Ref.	Description	Ft./lb.	Nm	Loctite®
1	Head Bolts	37	50	-
2	Valve Caps	103	140	243
3	Inlet Cap	103	140	-
4	Outlet Cap	103	140	243
5	Bearing Flange Bolts	19	25	-
6	Rear Cover Bolts	8	11	-
7	Connecting Rod Bolts	19	25	270
8	Plunger Bolts	15	20	270
9	Valve Cover Bolts	-	-	-
10	Oil Drain Plug	8	11	-

