


Gear Reduction, Gas Engine Models

1" or 1-1/8" Hollow Shaft, SAE J609-B Flange.

2.2:1 Gear Reduction Drive

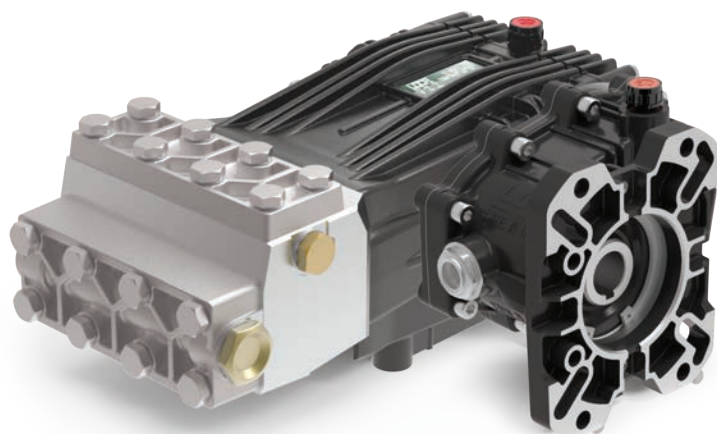

- Solid Ceramic Plungers
- Stainless Steel Check Valves
- Stainless Steel Block Manifold with Nickel Plated Valve Covers
- Deeper Back Cover for Increased Oil Capacity
- 34.5 oz. Capacity Vented Oil Bath Crank Case
- 3/4" BSP-F Inlet. 3/8" BSP-F Outlet
- Max Fluid Temp, 160°F

CHC Series Gas Engine, Gear Reduction Drive Plunger Pumps

CHC Series super duty plunger pumps include a wide range of models with flow rates from 3.2 to 5.3 GPM and pressures up to 7250 PSI.

Other drive options include a 24mm solid, keyed shaft.

Applications include general pressure cleaning,, construction, hydro-excavation and oil field applications.


	Model	Flow		Pressure		Plunger Dia.	Crankshaft		Power	Seal Kit	Valve Kit	Wt.
		GPM	l/min	PSI	bar		Stroke	Code				
Gear Reduction	CHC 12/50 GR	3.2	12.0	7250	500	15mm	17.0mm	X	20.0 HP Gas	6061.88	6061.G1	59 lbs
	CHC 16/50 GR	4.2	16.0	7250	500	15mm	22.0mm	1	26.0 HP Gas	6061.88	6061.G1	59 lbs
	CHC 20/50 GR	5.3	20.0	7250	500	18mm	19.0mm	Y	34.0 HP Gas	6061.G2	6061.G1	59 lbs

NOTE: All models available with 1" or 1-1/8" Hollow Shafts . Specify size when ordering (ex. **CHC 12/50 GR1** or **CHC 12/50 GR1-1/8.**)



MAX FLOW
MAX PRESSURE
RATED PUMP SPEED
POWER REQUIREMENT
LUBRICATION

5.3 GPM / 20.0 L/MIN
7250 PSI / 500 BAR
1450 RPM
34.0 HP GAS
34.5 OZ UDOR LUBE

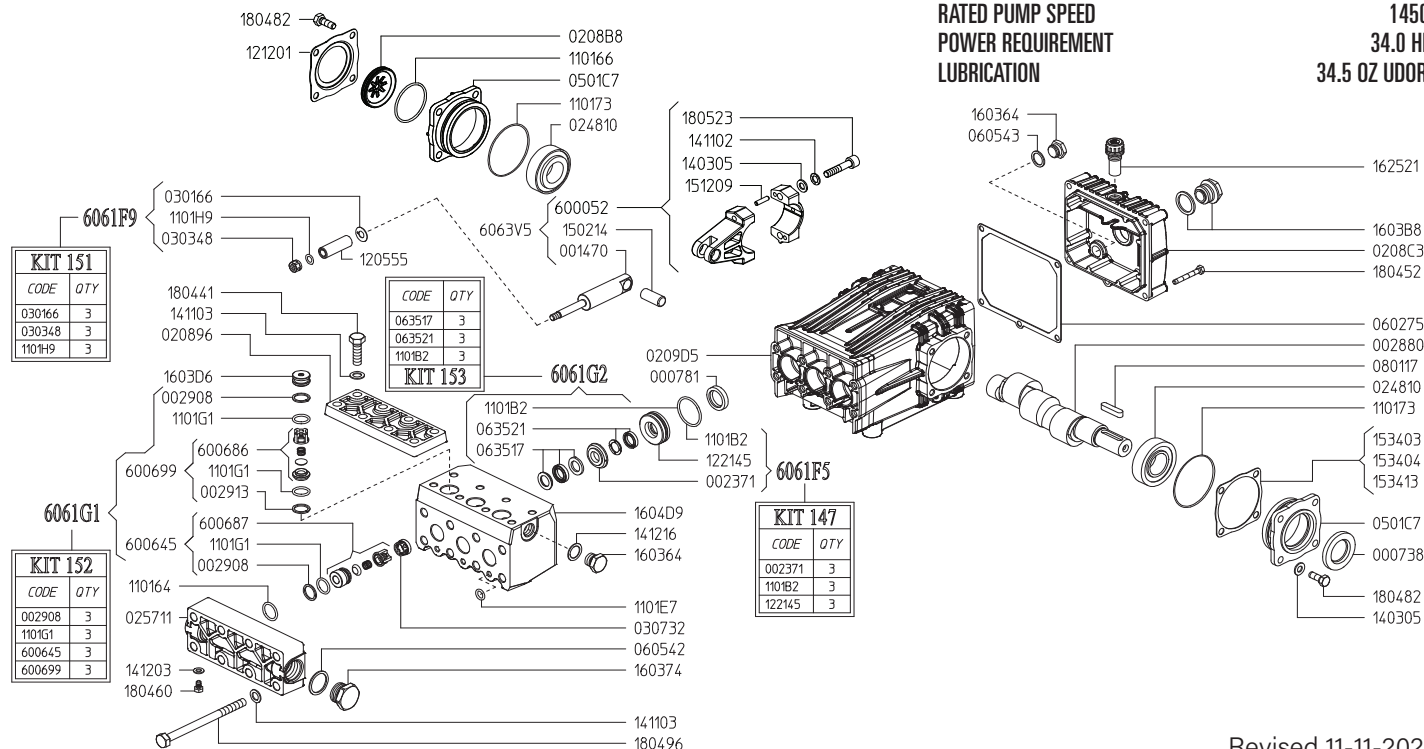

Revised 11-11-2024

Part #	Description	Qty
0007.38	OIL SEAL D30	1
0007.81	OIL SEAL D20	3
0014.69	PLUNGER GUIDE D15 "CH"	3
0023.71	UPPER RING D18 ^D	3
0028.80	MALE SHAFT D24	1
0029.08	RING ^A	3
0029.08	RING ^A / PART OF 6006.45	3
0029.13	RING ^A / PART OF 6006.99	3
0208.96	COVER "CH"	1
0208.B8	OIL SIGHT GLASS	1
0208.C3	BACK COVER "C/CK"	1
0209.D5	GRANKCASE "C/CK/CH"	1
0248.10	ROLLER BEARING D30	2
0257.11	SUCTION MANIFOLD	1
0301.66	SLINGER RING ^B	3
0303.48	NUT D18 ^B	3
0307.27	SPACER	3
0501.C7	BEARING HOLLOW FLANGE	2
0602.75	BACK COVER GASKET	1
0605.42	GASKET D27	1
0605.43	GASKET D17	1
0635.17	HIGH PRESSURE SEAL KIT D18 ^C	3
0635.21	LOW PRESSURE SEAL KIT D18 ^C	3
0801.17	KEY A8X7X35	1
1101.64	O-RING - SUCTION MANIFOLD	3
1101.66	O-RING - OIL SIGHT GLASS	1
1101.73	O-RING - BEARING FLANGE	2
1101.B2	O-RING - PRESSURE RING ^{C D}	3
1101.E7	O-RING - SPLIT MANIFOLD	3
1101.G1	O-RING - VALVE ^A	3
1101.G1	O-RING - VALVE ^A / in 6006.99	3
1101.G1	O-RING - VALVE ^A / in 6006.45	3
1101.H9	O-RING - PLUNGER ^B	3
1205.55	CERAMIC PLUNGER D18	3
1212.01	RETAINER - OIL SIGHT GLASS	1
1221.45	PRESSURE RING D18 ^D	3

Part #	Description	Qty
1403.05	WASHER D8.4	10
1411.02	SERRATED WASHER D8	6
1411.03	SERRATED WASHER D10	16
1412.03	BONDED WASHER D6.7	1
1412.16	BONDED WASHER D17.3	1
1502.14	PIN D14X32	3
1512.09	PLUG D5X20 UNI1707	6
1534.03	SHIM 0.1 MM	-
1534.04	SHIM 0.2 MM	-
1534.13	SHIM 0.05 MM	-
1603.64	PLUG G3/8	2
1603.74	PLUG G3/4	1
1603.B8	OIL PLUG G3/4 + GASKET	1
1603.D6	PLUG	3
1604.D9	HEAD PISTON D18 SS	1
1625.21	OIL PLUG G3/8	1
1804.09	HEX BOLT M8X40	6
1804.41	HEX BOLT M10X35	8
1804.52	HEX BOLT M6X45	5
1804.60	HEX BOLT M6X10	1
1804.82	HEX BOLT M8X22	8
1804.96	HEX BOLT M10X140	8
6000.52	ROD ASSEMBLY	3
6006.45	SUCTION VALVE ASS'Y COMPLETE ^A	3
6006.86	OUTLET VALVE ASS'Y W/O O-RING ^A / in 6006.99	3
6006.87	SUCTION VALVE ASS'Y W/O O-RING ^A / in 6006.45	3
6006.99	OUTLET VALVE ASS'Y COMPLETE ^A	3
6061.F5	BRASS RING KIT D18 (KIT 147)	
6061.F9	PLUNGER KIT D18 (KIT 151)	
6061.G1	VALVE KIT D18 (KIT 152)	
6061.G2	WATER SEAL KIT (KIT 153)	


^A Parts in 6061.G1 (Kit 152).

^B Parts in 6061.F9 (Kit 151).

^C Parts in 6061.G2 (Kit 153).

^D Parts in 6061.F5 (Kit 147).

**GAS ENGINE GEAR REDUCTION FOR
 B/BK/BS/BWT/C/CS/CWT/CK/CX-SERIES PLUNGER PUMPS
 on GAS ENGINES with 1" SHAFTS
 REQUIRES 11.5 OZ. 90W GEAR LUBE**

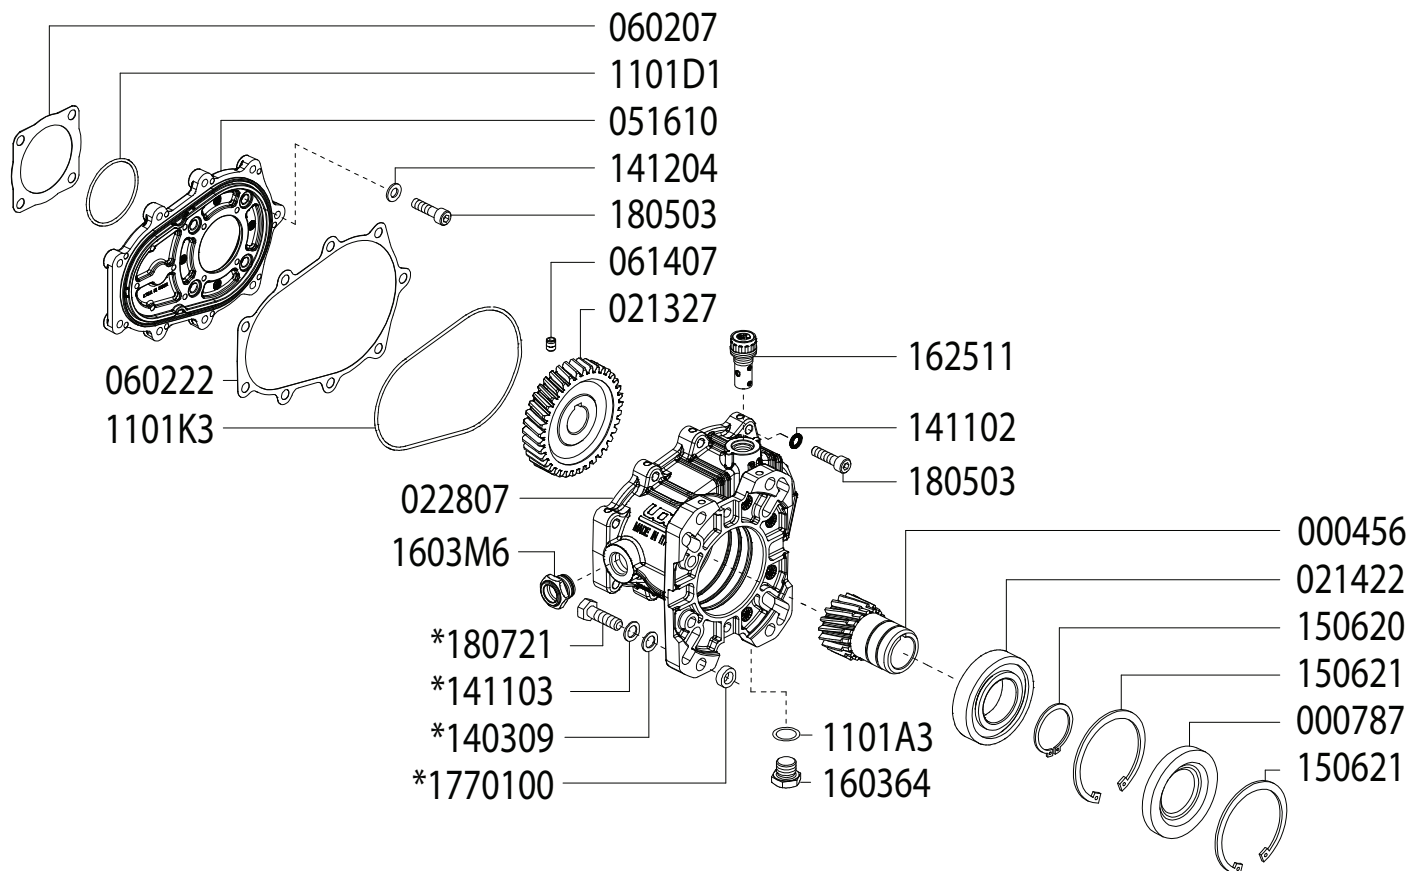


Updated 1-10-2025

Part #	Description	Qty	Part #	Description	Qty
0004.56	GEAR - 1"	1	1411.02	WASHER	9
0007.87	OIL SEAL - D40 - RBC122K	1	*1411.03	SERRATED WASHER	4
0213.27	PUMP GEAR	1	1412.04	WASHER	4
0214.22	BEARING - D40 - RBC122K	1	1506.20	SNAP RING - D40	1
0228.07	COUPLER - RBC122	1	1506.21	SNAP RING - D80	2
0516.10	FLANGE - RBC122	1	1603.64	PLUG - 3/8"	1
0602.07	GASKET - RC122	1	1603.M6	OIL SIGNT GLASS	1
0602.22	GASKET - RBC122 HOUSING	1	1625.11	OIL PLUG - G3/8"	1
0614.07	SET SCREW - M5X8	1	1805.03	ALLEN BOLT - M8x30	13
1101.A3	O-RING	1	*1807.21	HEX BOLT - 3/8-16 X 1-1/4"	5
1101.D1	O-RING	1	*1770.100	SPACER	4
1101.K3	O-RING	1			
*1403.09	WASHER	4			

* For use when using outer mounting holes only

**GAS ENGINE GEAR REDUCTION FOR
B/BK/BS/BWT/C/CS/CWT/CK/CX-SERIES PLUNGER PUMPS
on GAS ENGINES with 1-1/8" SHAFTS
REQUIRES 11.5 OZ. 90W GEAR LUBE**

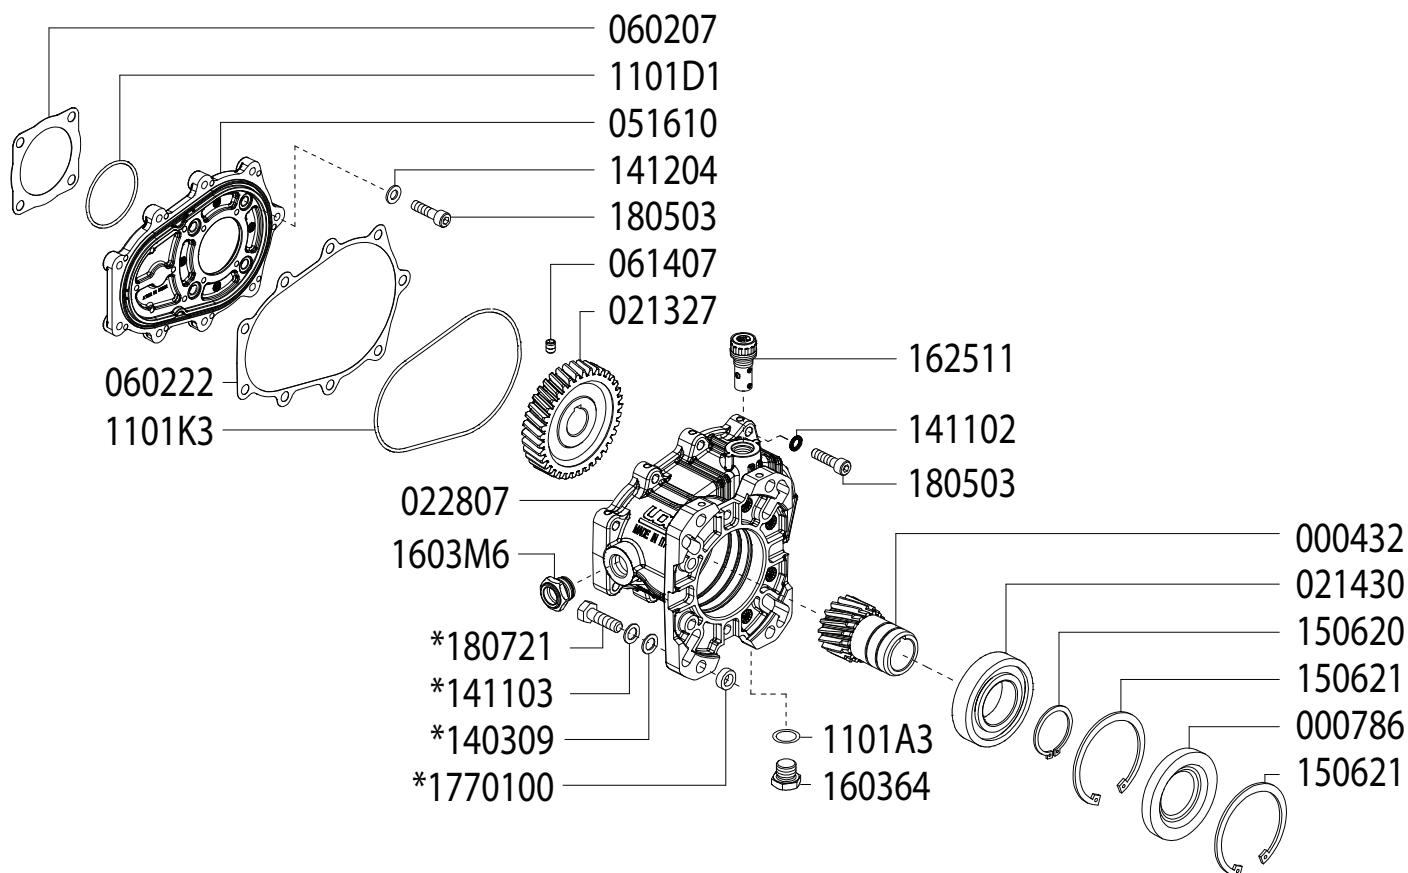

Updated 1-10-2025


Part #	Description	Qty
0004.32	GEAR – 1-1/8"	1
0007.86	OIL SEAL - D40 - RBC122X	1
0213.27	PUMP GEAR	1
0214.30	BEARING - D40 – RBC122X	1
0228.07	COUPLER – RBC122	1
0516.10	FLANGE – RBC122	1
0602.07	GASKET – RC122	1
0602.22	GASKET – RBC122 HOUSING	1
0614.07	SET SCREW – M5X8	1
1101.A3	O-RING	1
1101.D1	O-RING	1
1101.K3	O-RING	1
*1403.09	WASHER	4

Part #	Description	Qty
1411.02	WASHER	9
*1411.03	SERRATED WASHER	4
1412.04	WASHER	4
1506.20	SNAP RING - D40	1
1506.21	SNAP RING - D80	2
1603.64	PLUG – 3/8"	1
1603.M6	OIL SIGHT GLASS	1
1625.11	OIL PLUG – G3/8"	1
1805.03	ALLEN BOLT – M8x30	13
*1807.21	HEX BOLT - 3/8-16 X 1-1/4"	5
*17701.00	SPACER	4

* For use when using outer mounting holes only

*Dimensional Drawings are
Shown in Millimeters.
To Convert to Inches,
Multiply Dimension x 0.03937*

CH SERIES PUMPS - 24mm SOLID SHAFT

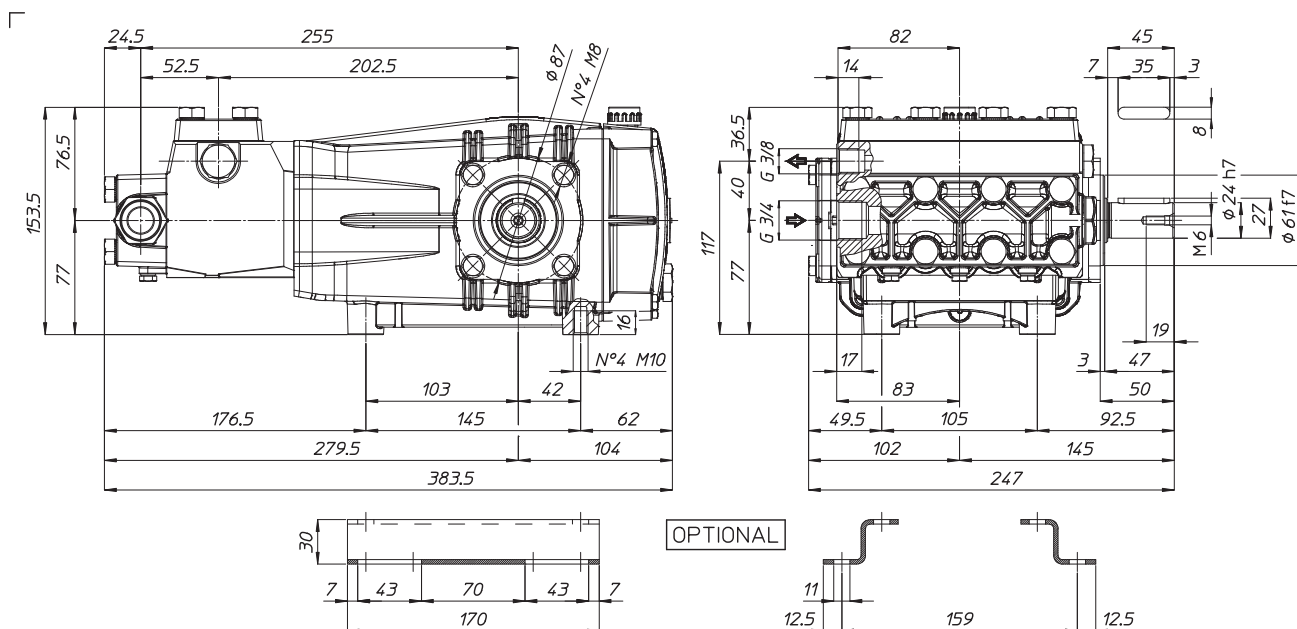

TORQUE SPECS

Ref.	Description	Ft./lb.	Nm	Loctite®
1	Head Bolts	37	50	-
2	Valve Caps	-	-	-
3	Inlet Cap	103	140	-
4	Outlet Cap	60	80	243
5	Bearing Flange Bolts	19	25	-
6	Rear Cover Bolts	8	11	-
7	Connecting Rod Bolts	19	25	270
8	Plunger Bolts	15	20	270
9	Valve Cover Bolts	37	50	-
10	Oil Drain Plug	8	11	-

