




Scan this QR Code
for more information




GREENTECH Diaphragms Standard. Buna-N Optional.

DELTA 170 4-cylinder, high pressure diaphragm pumps are internally manifolded with anodized aluminum construction and anodized aluminum and stainless steel liquid handling parts. Includes mounting rails and 6005.05 control unit with pressure gauge.


DELTA 170 pumps are excellent choices for various horticultural, agricultural, lawn care, nursery, pest control and turf spraying applications. They are also effectively used for aircraft de-icing, hydrostatic testing and cleaning applications.

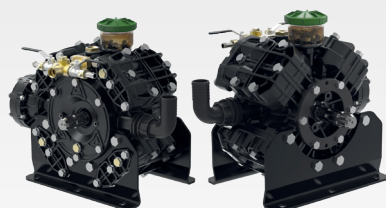

DELTA 170 TS2C


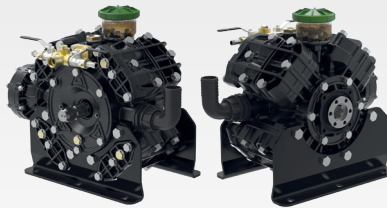


DELTA 170 TSMFVA

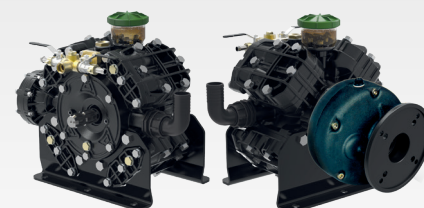

DELTA 170 GR1-1/8

Model	GPM	l/min	PSI	bar	RPM	Drive Configuration	Weight
DELTA 170 TS2C	47.3	179.5	725	49	550	1-3/8" 6-Spline Male PTO Thru-Shaft	110 LBS
DELTA 170 TSMFVA	47.3	179.5	725	49	550	1-3/8" 6-Spline PTO x Universal VA Drive Face	110 LBS
DELTA 170 GR1-1/8	47.3	179.5	725	49	550	Gear Reduction for 1-1/8" Shaft Gas Engines, 24-31 HP	130 LBS
DELTA 170 GR ASSY	47.3	179.5	725	49	550	--- See Next Page for Details ---	320 LBS

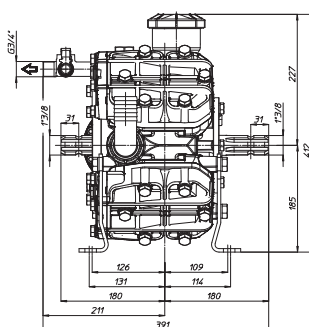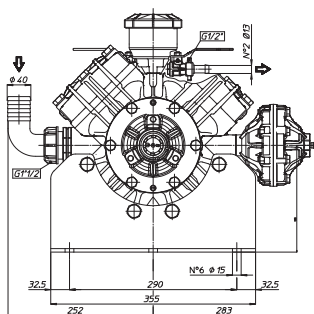

Dimensional Drawings are
Shown in Millimeters.
To Convert to Inches,
Multiply Dimension x 0.03937

Specifications

DELTA 170

Inlet Port	1-1/2" Hose Barb
Outlet Ports	(2) 1/2" Hose Barb
Bypass	1" Hose Barb
Piston Diameter	75mm
Crankshaft Stroke/Code	19.0mm / U
Dimensions	15.5"L x 21.5"W x 16.5"H

Lubrication: Requires 66 oz. of Udor Lube 40W Premium Pump Oil.
Alternate Oil: 30W non-detergent or 15W-40 non-detergent oil.

QUICK REFERENCE SERVICE PARTS

Description	Part #
Diaphragm Kit (GREENTECH)	6062.H7
Diaphragm Bolt / Washer Kit	6062.24
Valve Kit	6062.H8
Complete Repair Kit	8700.84CK

Recommended Accessories and Drive Options



6005.05
Control Unit
Regulator



5096.B5
Gear Reduction
1-1/8" Shaft Gas Engine



UD1-1/2-16
1-1/2" HI-Flow Filter
16 Mesh Screen



7753.A6
1-1/8" Male PTO
Shaft and Bolts



6066.09
Shaft Protector
and Mounting Bolts



15.5823
Udor Lube
Premium Pump Oil