

3-Cylinder, High-Pressure Diaphragm Pumps with 4900.09 - VRG 160 Regulator



DELTA 140 3-cylinder, high pressure diaphragm pumps are internally manifolded with anodized aluminum construction and anodized aluminum and stainless steel liquid handling parts. Includes mounting rails and 6005.05 control unit with pressure gauge.

DELTA 140 pumps are excellent choices for various horticultural, agricultural, lawn care, nursery, pest control and turf spraying applications. They are also effectively used for aircraft de-icing, hydrostatic testing and cleaning applications.


Model	GPM	l/min	PSI	bar	RPM	Drive Configuration	Weight
DELTA 140 TS2C	36.4	138.0	725	49	550	1-3/8" 6-Spline Male PTO Thru-Shaft	95 LBS
DELTA 140 TSMFVA	36.4	138.0	725	49	550	1-3/8" 6-Spline Male PTO x Universal VA Face	95 LBS
DELTA 140 GR1	36.4	138.0	725	49	550	Gear Reduction for Gas Engines with 1" Shaft, 8-20 HP	115 LBS

Specifications	DELTA 140	Description	Part #
Inlet Port	1-1/2" Hose Barb	Diaphragm Kit (GREENTECH)	6062.H5
Outlet Ports	(2) 1/2" Hose Barb	Diaphragm Bolt / Washer Kit	6062.16
Bypass	1" Hose Barb	Valve Kit	6062.H6
Piston Diameter	75mm	Regulator Repair Kit	6062.53
Crankshaft Stroke/Code	19.0mm / U	Complete Repair Kit	8700.83CK
Dimensions	19.0"L x 15.5"W x 14.5"H		

Lubrication: Requires 54 oz. of Udor Lube 40W Premium Pump Oil.
Alternate Oil: 30W non-detergent or 15W-40 non-detergent oil.




8700.83CK		6062H5 KIT 673		606216 KIT 515		6062H6 KIT 674	
CODE	QTY	CODE	QTY	CODE	QTY	CODE	QTY
010201	3	090316	1	010201	3	1101J4	6
030107	1	090361	3	030107	3	600697	6
090316	1	1101J7	6				
090361	3						
110101	6						
110142	1						
1101J4	6						
1101J7	6						
600697	6						



Maximum Flow	36.4 GPM / 138 lpm
Maximum Pressure	725 PSI / 49 bar
Maximum RPM	550 RPM
Inlet Port	1-1/2" Hose Barb
Outlet Ports	(2) 1/2" Hose Barb Valve, 3/4" MPT
Bypass	1" Hose Barb
Dimensions	19.0"L x 15.5"W x 14.5"H
Weight	115 lbs

Lubrication: Requires 54 oz. of Udor Lube 40W Premium Pump Oil.
Alternate Oil: 30W non-detergent or 15W-40 non-detergent oil.

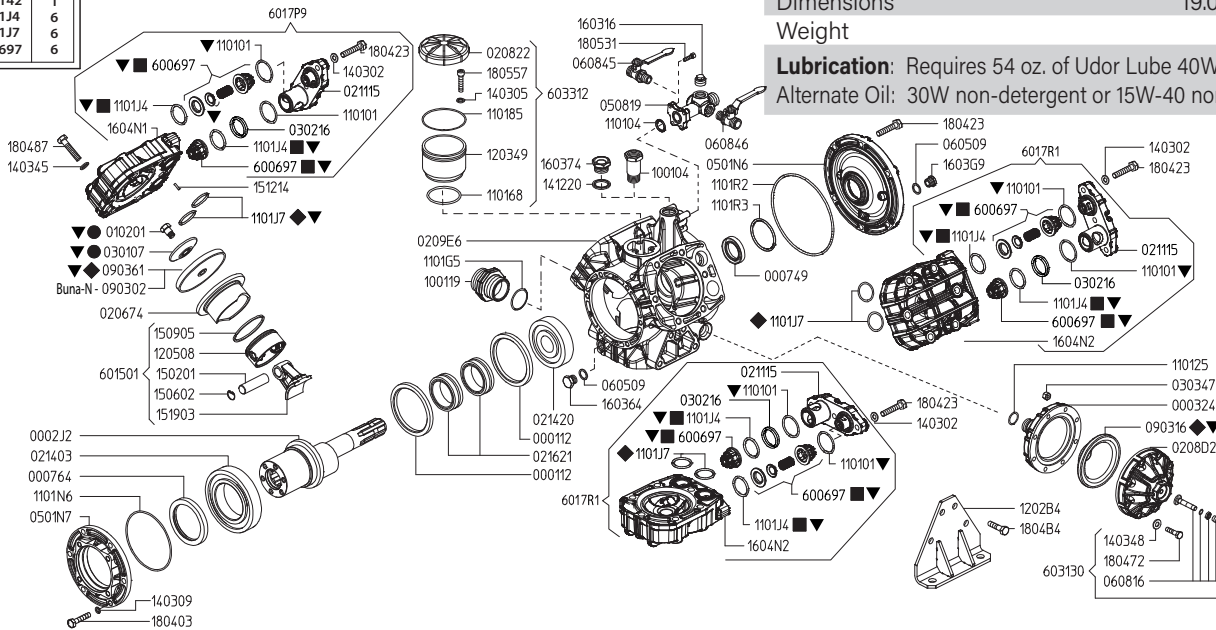


Revised 3-4-2026

Part #	Description	Qty
0001.12	RETAINER RING "DELTA 140"	2
0002.J2	SHAFT "DELTA 140" TS MFVA	1
0003.24	PRESSURE ACCUMULATOR	1
0007.49	OIL SEAL D35	1
0007.64	OIL SEAL D75	1
0102.01	DIAPHRAGM BOLT ●▼	3
0202.72	HOSE BARB D40	1
0206.74	SLEEVE "DELTA 140"	3
0208.22	OIL RESERVOIR COVER	1
0208.D2	ACCUMULATOR COVER	1
0209.E6	PUMP BODY "DELTA 140"	1
0211.13	VALVE COVER "DELTA 140"	3
0214.03	BALL BEARING D75	1
0214.20	BALL BEARING D35	1
0216.21	ROLLER BEARING D35	2
0301.07	DIAPHRAGM DISC ●▼	3
0302.16	SPACER	3
0303.47	HEX NUT M8X8	8
0501.N6	CRANKCASE FLANGE "DELTA 140"	1
0501.N7	FLANGE "DELTA 140" TS MFVA	1
0508.19	BALL VALVE FLANGE "DELTA 140"	1
0604.09	BRASS NUT G1/2	2
0604.50	BARB NUT G1-1/2"	1
0605.09	GASKET D17	2
0608.16	AIR VALVE ASSEMBLY	1
0608.26	HOSE BARB D13+GASKET	2
0608.45	BALL VALVE RIGHT	1
0608.46	BALL VALVE LEFT	1
0903.02	PISTON DIAPHRAGM 116MM BUNA-N	3
0903.16	ACCUMULATOR DIAPHRAGM ◆▼	1
0903.61	PISTON DIAPHRAGM 116MM GREENTECH ◆▼	3
1001.04	RISER FITTING	1
1001.19	INLET NIPPLE	1
1101.01	O-RING - VALVE COVER ▼	6
1101.04	O-RING - BALL VALVE FLANGE	1
1101.25	O-RING - PRESSURE ACCUMULATOR	1
1101.42	O-RING - INLET HOSE BARB ▼	1
1101.68	O-RING - OIL RESERVOIR	1
1101.85	O-RING - OIL RESERVOIR	1
1101.G5	O-RING - INLET NIPPLE	1
1101.J4	O-RING - VALVE ◆▼	6
1101.J7	O-RING - HEAD, VITON ◆▼	6
1101.N6	O-RING - CRANKSHAFT FLANGE	1

Part #	Description	Qty
1101.R2	O-RING - CRANKCASE FLANGE	1
1101.R3	O-RING - CRANKCASE FLANGE	1
1202.B4	BASE PLATE "DELTA 140"	2
1203.49	OIL RESERVOIR	1
1205.08	ALUMINIUM PISTON D75	3
1403.02	WASHER D10.5	9
1403.05	WASHER D8.4	3
1403.09	WASHER D10.5	6
1403.45	WASHER D13	18
1403.48	WASHER D8.4 DACROMET	8
1412.20	WASHER	1
1502.01	PIN D18X64	3
1506.02	SNAP RING D18	3
1509.05	PISTON RING D75	3
1512.14	PIN	3
1519.03	CONNECTING ROD	3
1603.16	PLUG G1/2	1
1603.64	OIL PLUG	1
1603.74	PLUG	1
1603.G9	PLUG	1
1604.N1	RIGHT HEAD "DELTA 140"	1
1604.N2	LEFT HEAD "DELTA 140"	2
1804.03	HEX BOLT M10X30	6
1804.23	HEX BOLT M10X40	15
1804.72	HEX BOLT M8X50	8
1804.87	HEX BOLT	18
1804.B4	HEX BOLT	8
1805.31	ALLEN BOLT M6X30	4
1805.57	ALLEN BOLT	3
6006.97	VALVE ASSEMBLY W/O O-RING ■▼	6
6015.01	ROD ASSY "DELTA 140" D75	3
6017.P9	HEAD ASSEMBLY - RIGHT	1
6017.R1	HEAD ASSEMBLY - LEFT	2
6031.30	PRESSURE ACCUMULATOR ASSEMBLY	1
6033.12	OIL RESERVOIR ASSEMBLY	1
6062.16	DIAPHRAGM BOLT / WASHER (KIT 515)	1
6062.H5	DIAPHRAGM KIT - GREENTECH (KIT 673)	1
6062.H6	IN/OUT VALVE KIT (KIT 674)	1
8700.83CK	COMPLETE REPAIR KIT	1

- Parts in 6062.16 (Kit 515)
- ◆ Parts in 6062.H5 (Kit 673)
- Parts in 6062.H6 (Kit 674)
- ▼ Parts in 8700.83CK (Complete Repair Kit)

**6.25:1 GAS ENGINE GEAR REDUCTION FOR
DELTA 100/125/140 DIAPHRAGM PUMPS
on GAS ENGINES with 1" x 2-7/8" SHAFTS**
REQUIRES 28 OZ. 90W GEAR LUBE

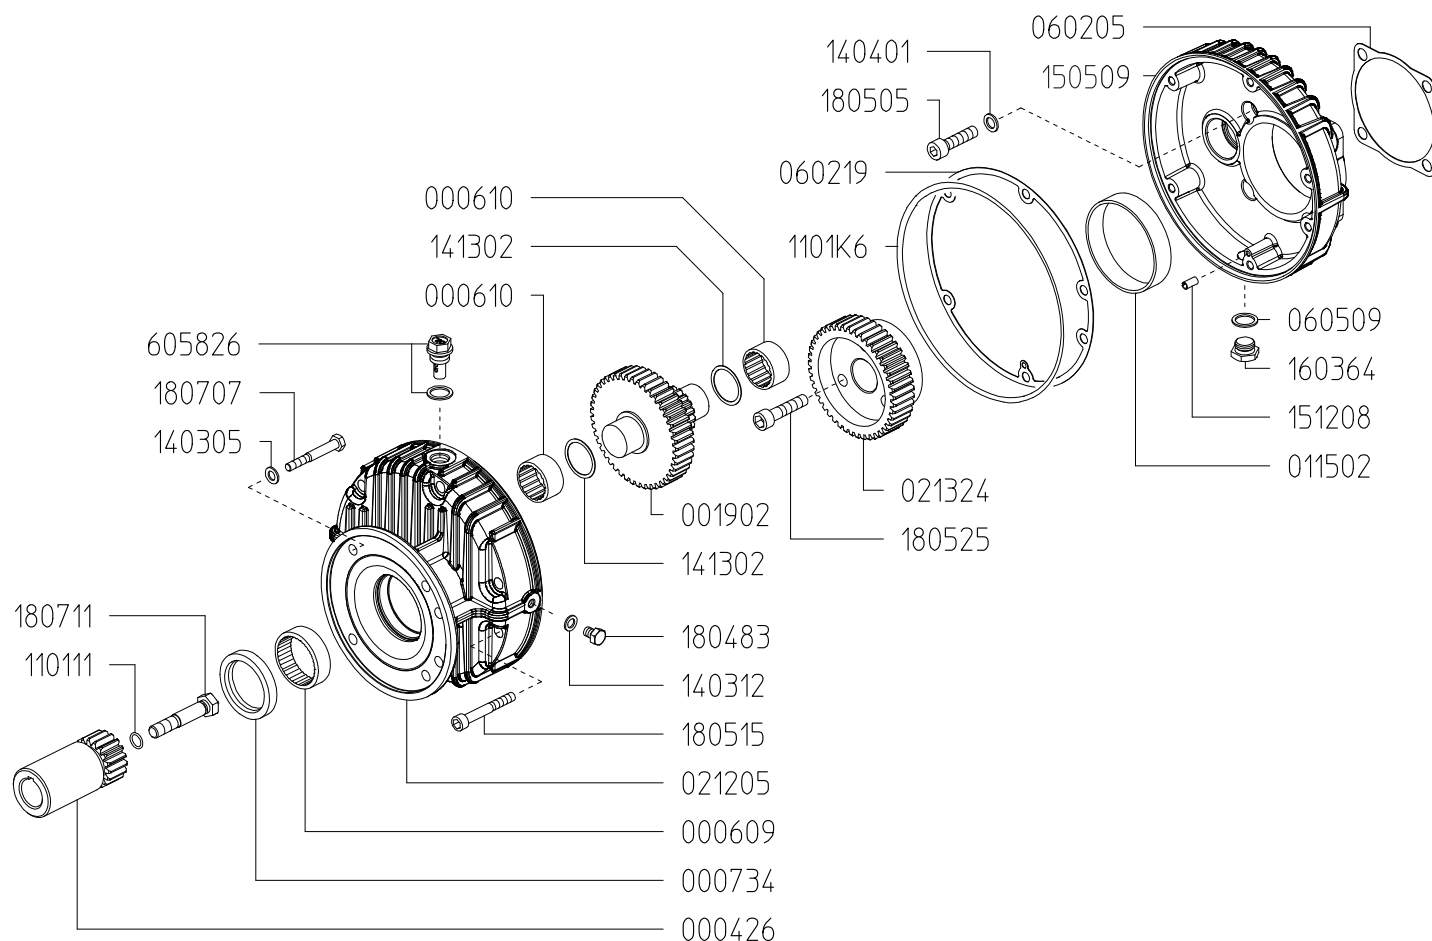


Revised 3-4-2026

Part #	Description	Qty	Part #	Description	Qty
0004.26	GEAR SHAFT "S162-1"	1	1403.05	WASHER D8.4	4
0006.09	BUSHING D45	1	1403.12	GASKET D8.5	1
0006.10	BUSHING D30	2	1413.02	WASHER D30	2
0007.34	OIL SEAT D45	1	1505.09	GEAR BODY "S162"	1
0019.02	GEAR SHAFT "S162"	1	1512.08	PIN - D4X16	1
0115.02	BUSHING D80 GLY	1	1603.64	PLUG G3/8	1
0212.05	REDUCER COVER "S162"	1	1804.83	HEX BOLT M8X12	1
0213.24	RED.GEAR WHEEL Z=45 "S162-VA"	1	1805.05	ALLEN BOLT M10X30	4
0602.05	GASKET	1	1805.15	ALLEN BOLT M8X60	6
0602.19	GASKET "S162"	1	1805.25	ALLEN BOLT M10X45	3
0605.09	GASKET D17	1	1807.07	HEX BOLT 5/16X1" UNF	4
0605.41	GASKET D10	4	1807.11	HEX BOLT 7/16"X2" UNF	1
1101.11	O-RING - GEAR SHAFT	1	6058.26	OIL PLUG G3/8	1
1101.K6	O-RING - COVER/BODY	1			

Adjustable Pressure Regulator

Maximum Flow	47.3 GPM / 179.2 lpm
Maximum Pressure	1470 PSI / 10 bar
Inlet Port	3/4" Male BSP
Outlet Ports	-
Bypass - Hose Barb	1" HB

606254	
KIT 553	
CODE	QTY
090325	1
110101	1
110131	1
120413	1
150113	1
181001	1

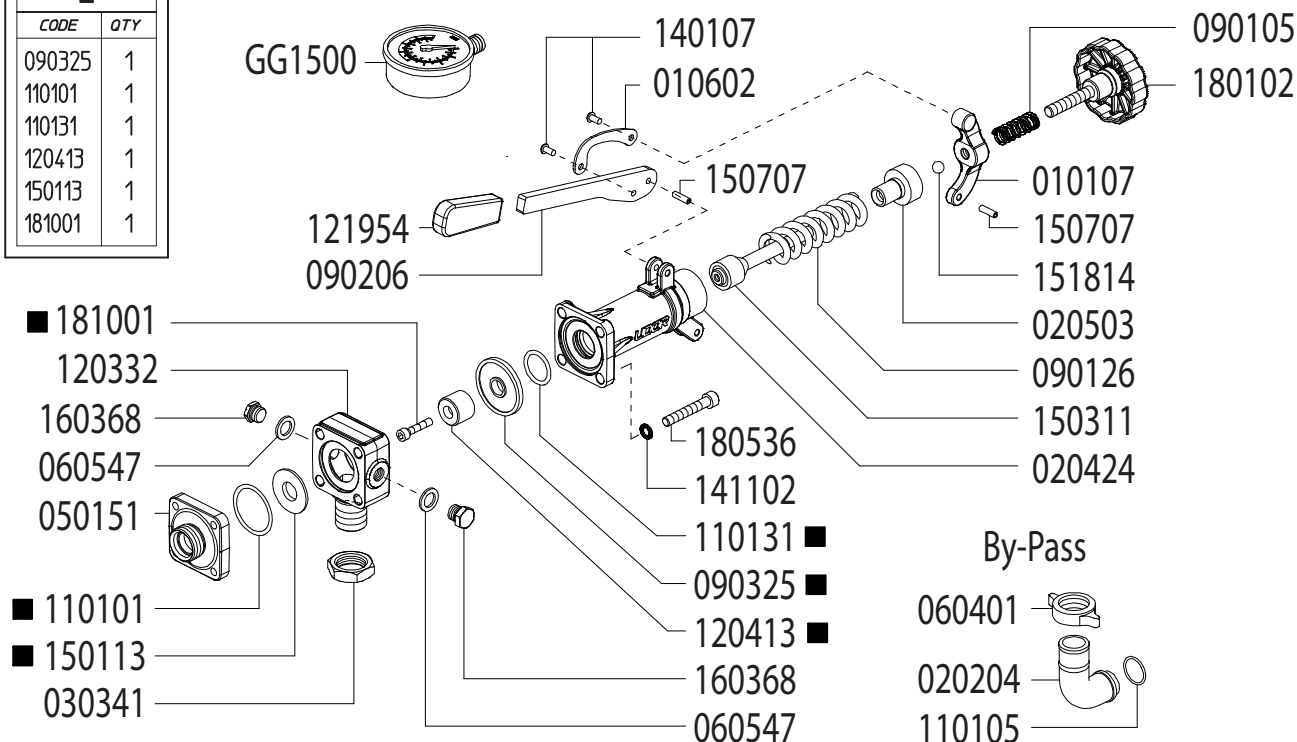

Revised 10-9-2025

Part #	Description	Qty
0101.07	LEVER GUIDE	1
0106.02	PRESSURE BAIL	1
0202.04	1" BRASS ELBOW HOSE BARB	1
0204.24	VALVE BODY	1
0205.03	VALVE CYLINDER	1
0303.41	NUT	1
0501.50	FLANGE	1
0604.01	BARB NUT	1
0605.47	GASKET D8	1
0901.05	SPRING	1
0901.26	SPRING	1
0902.06	HANDLE	1
0903.25	DIAPHRAGM	1
1101.01	O-RING - BYPASS FLANGE	1
1101.05	O-RING - BYPASS HOSE BARB	1
1101.31	O-RING - VALVE BODY	1
1203.32	INLET ELBOW - 3/4" MALE BSP	1

Part #	Description	Qty
1204.13	POPPET	1
1219.54	HANDLE COVER - RUBBER	1
1401.07	RIVET	2
1411.02	WASHER	4
1501.13	SEAT	1
1503.11	REGULATOR STEM	1
1507.07	PIN	2
1518.14	BALL	1
1603.68	PLUG - 1/4" BRASS	1
1801.02	ADJUSTMENT KNOB	1
1805.36	BOLT	4
1810.01	BOLT - STAINLESS STEEL	1
GG1500	HIGH PRESSURE GAUGE (OPTIONAL)	1
6062.54	REPAIR KIT (KIT 553)	

■ Parts Included in Repair Kit #6062.54 (KIT 553)

OPERATING INSTRUCTIONS

- Before operating or re-operating pump, lift R.V. Handle (0902.05) so pump will start at zero pressure.
FAILURE TO DO SO WILL VOID PUMP WARRANTY.
- Turn Pressure Adjustment Knob (1801.02) counter-clockwise to relieve spring tension. (Step 2 is only necessary on initial start-up and is not necessary for daily operation.)
- Start unit and let run until air is evacuated from system, when only liquid is expelled from the bypass line.
- Return R.V. Handle (0902.05) to down position. Open spray gun or spray boom and turn adjustment knob (1801.02) clockwise until desired operating pressure is achieved.

**All Dimensions are WITHOUT
Control Unit or Regulator**



**Dimensional Drawings are
Shown in Millimeters.
To Convert to Inches,
Multiply Dimension x 0.03937**

Specifications

DELTA 140

Inlet Port - Hose Barb	1-1/4"HB
Outlet Ports - Hose Barb	(2) 1/2"HB
Bypass - Hose Barb	3/4" HB
Dimensions	19.0"L x 15.5"W x 14.5"H
Diaphragm Material	GREENTECH (Std) Buna-N (Opt)

Lubrication: Requires 54 oz. of Udor Lube 40W Premium Pump Oil.
Alternate Oil: 30W non-detergent or 15W-40 non-detergent oil.

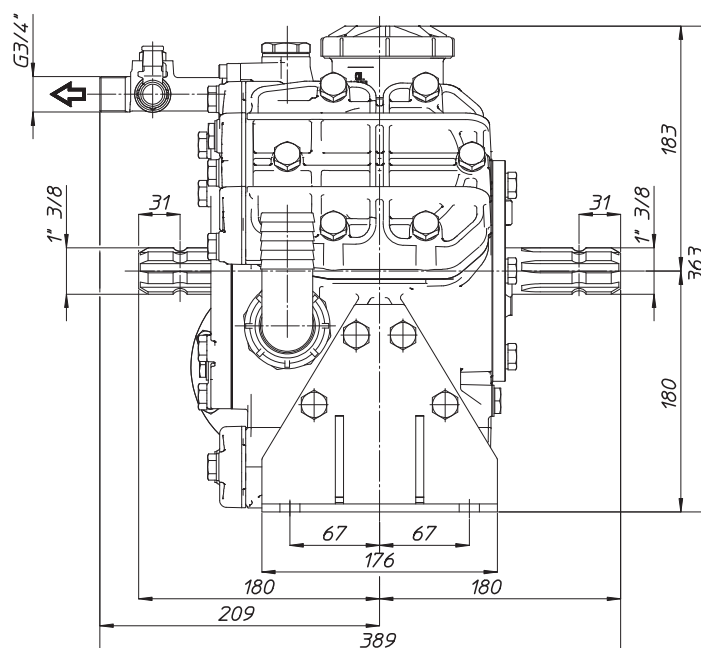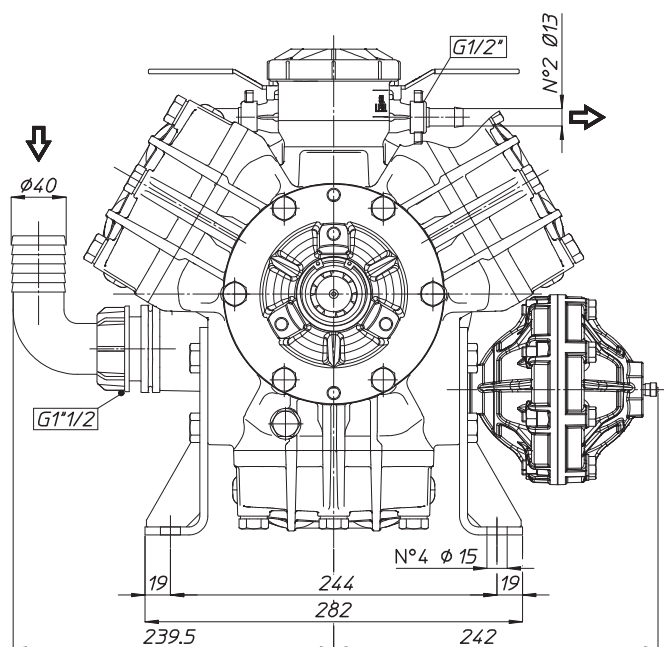

TORQUE SPECS

Ref.	Description	Ft./lb.	Nm
1	Diaphragm Bolts (Use Loctite 243)	23	30
2	Head Bolts	37	50
3	Pulsation Dampener Bolts	18	25
4	Inlet Flange Bolts	7	10
5	Bearing Flange Bolts	25	34
6	Oil Cup Bolts	7	10
7	Valve Cover Bolts	36	50

