



GAMMA 125 SERIES

1-3/8" 6 Spline PTO Thru Shaft

Multiple Drive Options Available
600 RPM



- Anodized Aluminum Crankcase
- High Strength Aluminum Connecting Rods
- Solid Ceramic Plungers
- Stainless Steel Check Valves
- 1-1/2" Hose Barb Inlet.
- (2) 3/4" BSP-F Outlet
- 128 oz. Capacity Vented Oil Bath Crank Case
- Max Fluid Temp, 160°F

TS 1C
1-3/8" PTO x
35mm Keyed



TS 2C
1-3/8" PTO x
1-3/8" PTO



GAMMA 125 Series Plunger Pumps

GAMMA 125 Series industrial duty plunger pumps are rated at 35.1 GPM and pressures up to 870 PSI.

Pumps are available with a 1-3/8" male PTO through shaft with the option of a 2nd 1-3/8" male PTO shaft or a 35mm solid, keyed shaft.

Applications include fire fighting,, construction, de-icing and orchard spraying.

	Model	Flow		Pressure		Plunger Dia.	Crankshaft		Power	Seal Kit	Valve Kit	Wt.
		GPM	l/min	PSI	bar		Stroke	Code				
600 RPM	GAMMA 125 TS 1C	35.1	133.0	870	60	50mm	38.0mm	V	21 EBHP	6062.50	6062.49	83 lbs
	GAMMA 125 TS 2C	35.1	133.0	870	60	50mm	38.0mm	V	21 EBHP	6062.50	6062.49	83 lbs



**World Leader in
Diaphragm and Plunger Pumps**

6180 140th Avenue NW
Ramsey, MN 55303

Ph: 651-785-0666
Fax: 800-732-2670

www.udorusa.com
sales@udorusa.com




Scan this QR Code
for More Information

**G125TS
2026A**

MAX FLOW
MAX PRESSURE
RATED PUMP SPEED
POWER REQUIREMENT
LUBRICATION

35.1 GPM / 133.0 L/MIN
870 PSI / 60 BAR
600 RPM
21.0 HP ELECTRIC
128 OZ UDOR LUBE

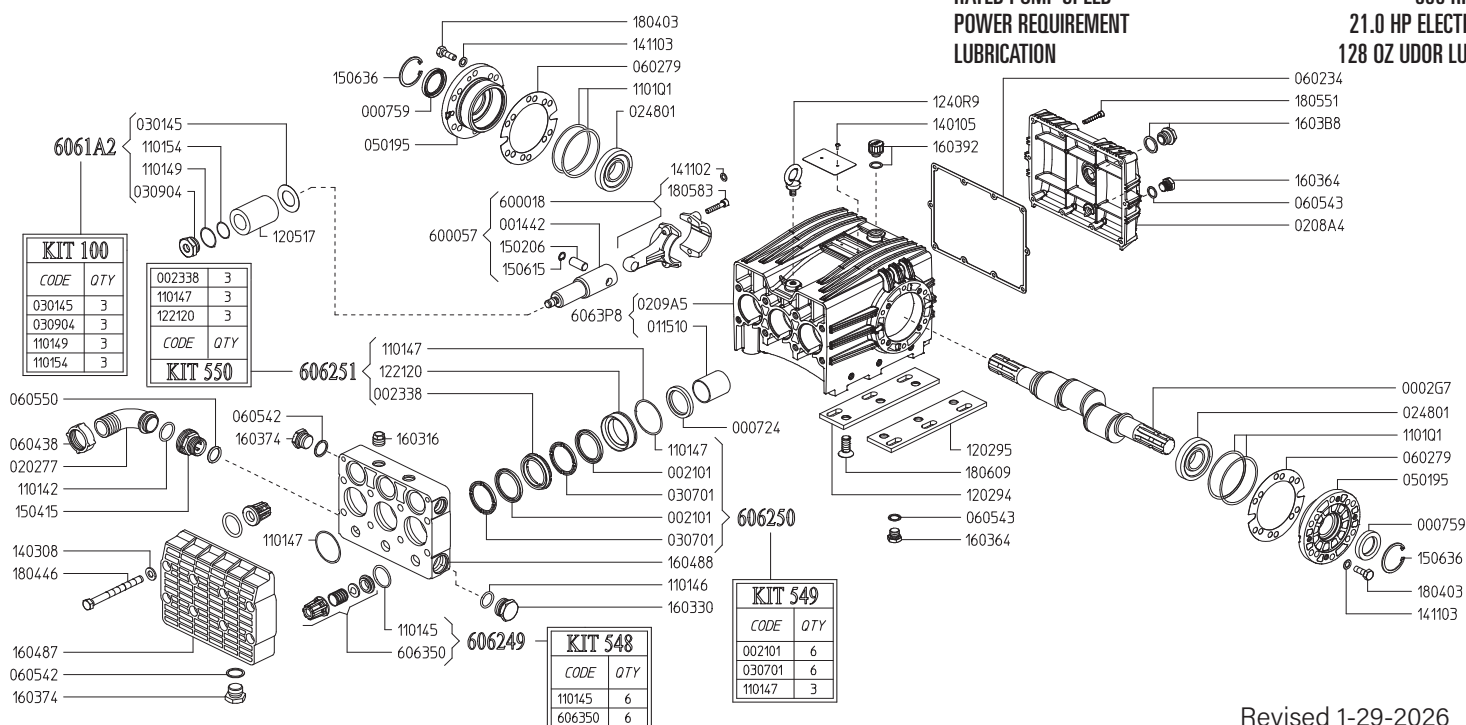

Revised 1-29-2026

Part #	Description	Qty
0002.G7	SHAFT TS2C	1
0007.24	OIL SEAL D40	3
0007.59	OIL SEAL D35	2
0014.42	PLUNGER GUIDE	3
0021.01	PISTON SEAL RING D50 ^C	6
0023.38	UPPER RING D50 ^D	3
0115.10	BUSHING D40	3
0202.77	HOSE BARB D40	1
0208.A4	BACK COVER	1
0209.A5	CRANKCASE	1
0248.01	ROLLER BEARING D35	2
0301.45	DISC ^A	3
0307.01	SPACER RING D50 ^B	6
0309.04	NUT D50 ^A	3
0501.95	BEARING FLANGE	2
0602.34	BACK COVER GASKET	1
0602.79	FLANGE GASKET	2
0604.38	BRASS NUT M46X2	1
0605.42	GASKET D27	3
0605.43	GASKET D17	2
0605.50	GASKET D33	1
1101.42	O-RING D32 (RIF.3832)	1
1101.45	O-RING - VALVE ^B	6
1101.46	O-RING - INLET PORT	1
1101.47	O-RING - SPLIT MANIFOLD	3
1101.47	O-RING - PRESSURE RING ^{C D}	3
1101.49	O-RING - PLUNGER BOLT OUTER ^A	3
1101.54	O-RING - PLUNGER BOLT INNER ^A	3
1101.Q1	O-RING - BEARING FLANGE	4
1202.94	LEFT BASE PLATE	1
1202.95	RIGHT BASE PLATE	1
1205.17	CERAMIC PLUNGER D50	3
1221.20	PRESSURE RING D50 ^D	3

Part #	Description	Qty
1240.R9	LIFTING HOOK M10	1
1401.05	RIVET UNI7346-3,5X8	2
1403.08	WASHER D13	8
1411.02	SERATED WASHER D8	6
1411.03	SERATED WASHER D10	8
1502.06	PIN D15X32.3	3
1504.15	BRASS INLET CONNECTOR	1
1506.15	SNAP RING D15	3
1506.36	SNAP RING D55	2
1603.16	PLUG G1/2	2
1603.30	PLUG G1"	1
1603.64	PLUG G3/8	2
1603.74	PLUG G3/4	3
1603.92	OIL PLUG G1/2	1
1603.B8	OIL PLUG G3/4 + GASKET	1
1604.87	FRONT HEAD	1
1604.88	MIDDLE HEAD	1
1804.03	HEX BOLT M10X30	8
1804.46	HEX BOLT M12X130	8
1805.23	ALLEN BOLT M8X40	6
1805.51	ALLEN BOLT M6X40	10
1806.09	SCREW M14X35	6
6000.18	ROD ASSEMBLY	3
6000.57	COMPLETE ROD ASSEMBLY	3
6063.50	VALVE ASSEMBLYW/O O-RING ^B	6
6063.P8	CRANKCASE ASSEMBLY	1
6061.A2	PLUNGER KIT (KIT 100)	1
6062.49	IN/OUTLET VALVE KIT (KIT 548)	1
6062.50	WATER SEAL KIT (KIT 549)	1
6062.51	BRASS RING KIT (KIT 550)	1

^A Parts in 6061.A2 (Kit 100).




^B Parts in 6062.49 (Kit 548).

^C Parts in 6062.50 (Kit 549).

^D Parts in 6062.51 (Kit 550).

WEIGHT 83 LBS
 LUBRICATION 128 OZ UDOR LUBE
 SHAFT OPTIONS
 TS1C ... 1-3/8" 6-Spline Male PTO x 35mm Solid Keyed Thru-Shaft
 TS2C 1-3/8" 6-Spline Male PTO Thru-Shaft

*Dimensional Drawings are
 Shown in Millimeters.
 To Convert to Inches,
 Multiply Dimension x 0.03937*

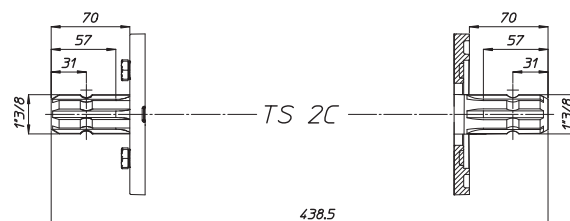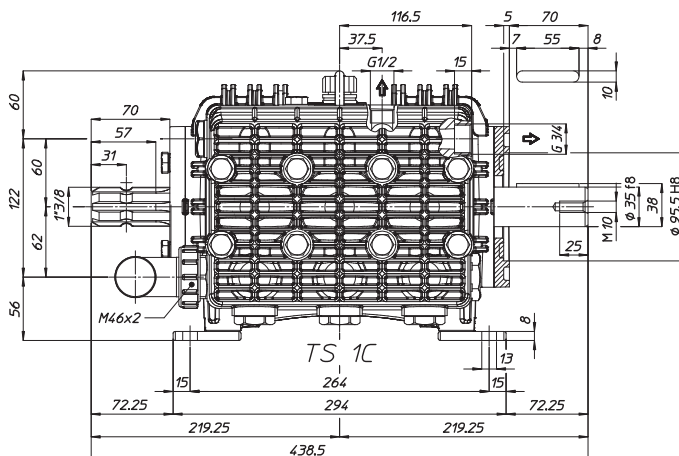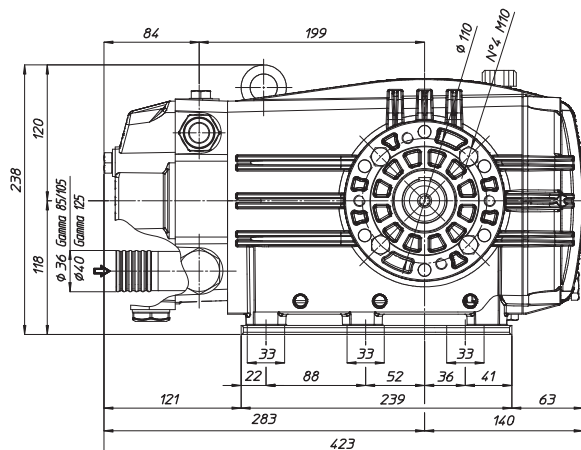

TORQUE SPECS

Ref.	Description	Ft./lb.	Nm	Loctite®
1	Head Bolts	66	90	-
2	Valve Caps	-	-	-
3	Inlet Cap	133	180	-
4	Outlet Cap	103	140	243
5	Bearing Flange Bolts	37	50	-
6	Rear Cover Bolts	8	11	-
7	Connecting Rod Bolts	19	25	243
8	Plunger Bolts	48	65	243
9	Valve Cover Bolts	-	-	-
10	Oil Drain Plug	8	11	-

