

3-Cylinder, Medium-Pressure Diaphragm Pumps with 4900.09 - VRG 160 Regulator



OMEGA 135 3-cylinder, high pressure, high volume diaphragm pumps are constructed of anodized aluminum, brass and stainless steel and have anodized aluminum, brass and stainless steel liquid handling parts. Includes mounting rails and 6005.05 control unit with pressure gauge. Simplicity of design and common parts allow for easy and economical maintenance.

OMEGA 135 pumps are excellent choices for various horticultural and agricultural spraying applications.

Model	GPM	l/min	PSI	bar	RPM	Drive Configuration	Weight
OMEGA 135 TS2C	39.0	140	580	40	550	1-3/8" 6-Spline Male PTO Thru-Shaft	62 LBS

Specifications	OMEGA 135	Description	Part #
Inlet Port	1-1/2" Hose Barb	Diaphragm Kit (GREENTECH)	6062.H2
Outlet Ports	(2) 1/2" Hose Barb Valve, 3/4" FPT	Diaphragm Bolt & Washer Kit	6062.16
Bypass	1" Hose Barb	Valve Kit	6062.D9
Piston Diameter	75mm		
Crankshaft Stroke/Code	19.0mm / U		
Dimensions	17.4"L x 15.5"W x 17.2"H		

Lubrication: Requires 54 oz. of Udor Lube 40W Premium Pump Oil.
Alternate Oil: 30W non-detergent or 15W-40 non-detergent oil.




OMEGA 135 TS2C

Maximum Flow	37.0 GPM / 140 lpm
Maximum Pressure	580 PSI / 40 bar
Maximum RPM	550 RPM
Inlet Port	1-1/2" Hose Barb
Outlet Ports	(2) 1/2" Hose Barb Valve, 3/4" FPT
Bypass	1" Hose Barb
Dimensions	17.4"L x 15.5"W x 17.2"H
Weight	62 lbs

Lubrication: Requires 54 oz. of Udor Lube 40W Premium Pump Oil.
Alternate Oil: 30W non-detergent or 15W-40 non-detergent oil.

6062H2 KIT 670		6062D9 KIT 642		606216 KIT 515	
CODE	QTY	CODE	QTY	CODE	QTY
090314	1	110101	6	010201	3
090361	3	600697	6	030107	3
110101	6				

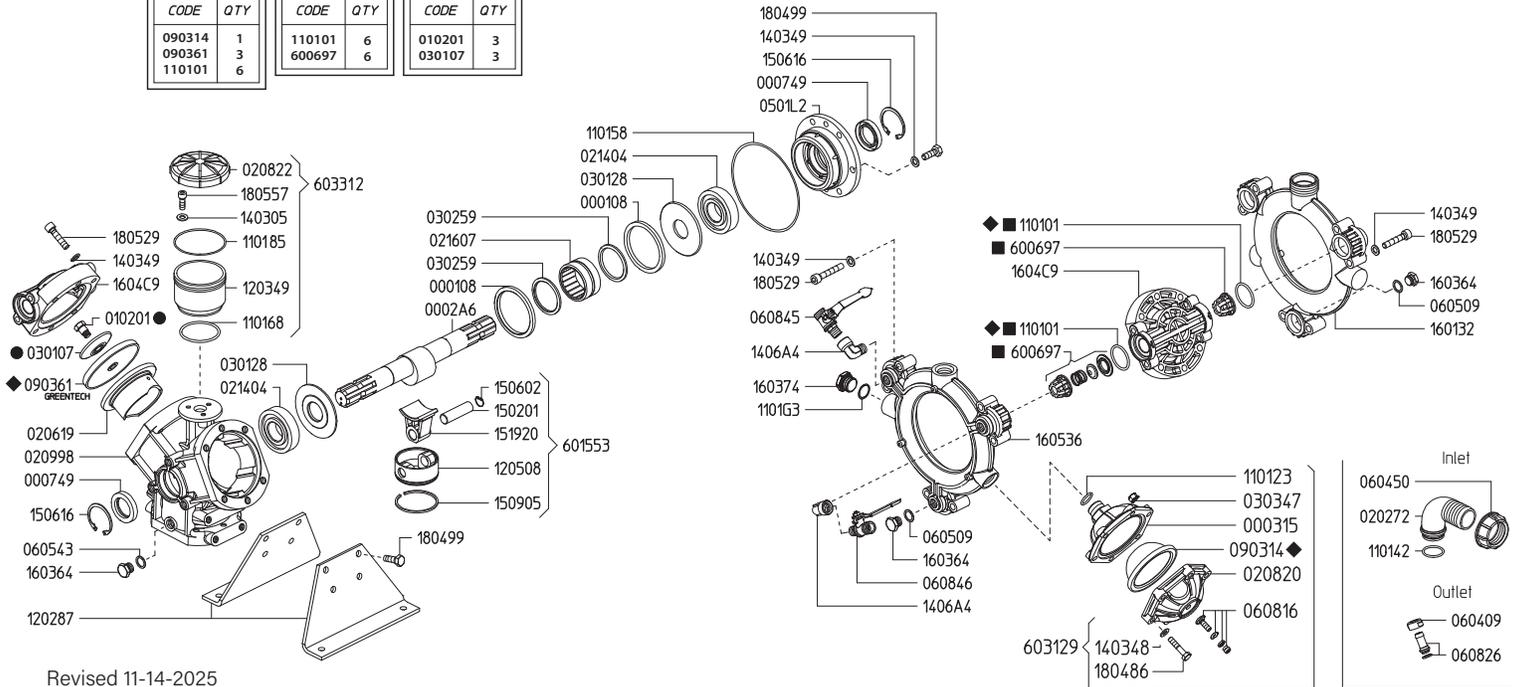

Revised 11-14-2025

Part #	Description	Qty
0001.08	RETAINER RING "ZETA 170/260"	2
0002.A6	SHAFT "ZETA 350/OMEGA" TS 2C	1
0003.15	PRESSURE ACCUMULATOR BASE	1
0007.49	OIL SEAL D35	2
0102.01	DIAPHRAGM BOLT ●	3
0202.72	HOSE BARB D40	1
0206.19	SLEEVE D75	3
0208.20	PRESSURE ACCUMULATOR COVER	1
0208.22	OIL RESERVOIR COVER	1
0209.98	CRANKCASE	1
0214.04	BALL BEARING D35	2
0216.07	ROLLER BEARING D55	1
0301.07	DIAPHRAGM DISC "ZETA/KAPPA 121/151" ●	3
0301.28	ROD DISC "ZETA 170/200/260/300"	2
0302.59	ROD SPACER "ZETA 230/260"	2
0303.47	HEX NUT M8X8	8
0501.L2	BUSHING FLANGE "OMEGA 135/139"	1
0604.09	BRASS NUT G1/2	1
0604.50	BARB NUT G1-1/2"	1
0605.09	GASKET D17	2
0605.43	GASKET D17	1
0608.16	AIR VALVE ASSEMBLY	1
0608.26	HOSE BARB D13+GASKET	1
0608.45	BALL VALVE RIGHT	1
0608.46	BALL VALVE LEFT	1
0903.14	ACCUMULATOR DIAPHRAGM ◆	1
0903.61	PISTON DIAPHRAGM D116 GREENTECH ◆	3
1101.01	O-RING - VALVE ■◆	6
1101.23	O-RING - ACCUMULATOR	1
1101.42	O-RING - INLET HOSE BARB	1
1101.58	O-RING - BEARING FLANGE	1
1101.68	O-RING - OIL RESERVOIR	1
1101.85	O-RING - OIL RESERVOIR	1


Part #	Description	Qty
1101.G3	O-RING - PLUG	1
1202.87	BASE PLATE	2
1203.49	OIL RESERVOIR	1
1205.08	ALUMINIUM PISTON D75	3
1403.05	WASHER M8	11
1403.48	WASHER D8.4 DACROMET	6
1403.49	WASHER M10	36
1406.A4	ELBOW G3/8 M - G3/8 F	2
1502.01	PIN D18X64	3
1506.02	SNAP RING D18	3
1506.16	SNAP RING D55	2
1509.05	PISTON RING D75	3
1519.20	CONNECTING ROD	3
1601.32	SUCTION MANIFOLD	1
1603.64	PLUG G3/8	3
1603.74	PLUG G3/4	1
1604.C9	HEAD	3
1605.36	OUTLET MANIFOLD	1
1804.86	HEX BOLT M8X40	6
1804.99	HEX BOLT M10X25	8
1805.29	ALLEN BOLT M10X55	30
1805.57	ALLEN BOLT M8X22	3
6006.97	VALVE ASSEMBLY W/O O-RING ■	6
6015.53	ROD ASSY "OMEGA 135" D75	3
6031.29	PRESSURE ACCUMULATOR ASSEMBLY	1
6033.12	OIL RESERVOIR ASSEMBLY	1
6062.16	DIAPHRAGM BOLT/WASHER KIT (KIT 515)	1
6062.D9	IN/OUTLET VALVE KIT (KIT 642)	1
6062.H2	DIAPHRAGM KIT - GREENTECH (KIT 670)	1

- Parts in 6062.16 (Kit 515)
- Parts in 6062.D9 (Kit 642)
- ◆ Parts in 6062.H2 (Kit 670)

Adjustable Pressure Regulator

Maximum Flow	47.3 GPM / 179.2 lpm
Maximum Pressure	1470 PSI / 10 bar
Inlet Port	3/4" Male BSP
Outlet Ports	-
Bypass - Hose Barb	1" HB

606254	
KIT 553	
CODE	QTY
090325	1
110101	1
110131	1
120413	1
150113	1
181001	1

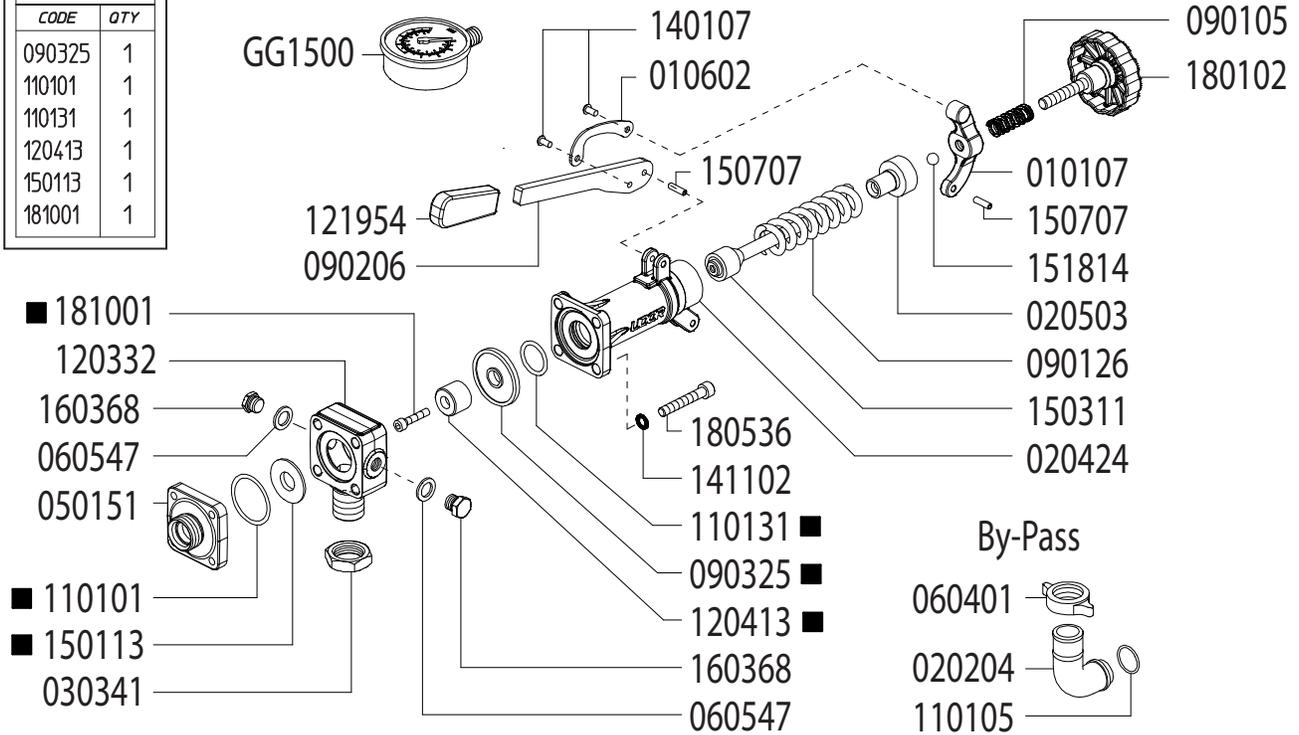

Revised 10-9-2025

Part #	Description	Qty
0101.07	LEVER GUIDE	1
0106.02	PRESSURE BAIL	1
0202.04	1" BRASS ELBOW HOSE BARB	1
0204.24	VALVE BODY	1
0205.03	VALVE CYLINDER	1
0303.41	NUT	1
0501.50	FLANGE	1
0604.01	BARB NUT	1
0605.47	GASKET D8	1
0901.05	SPRING	1
0901.26	SPRING	1
0902.06	HANDLE	1
0903.25	DIAPHRAGM	1
1101.01	O-RING - BYPASS FLANGE	1
1101.05	O-RING - BYPASS HOSE BARB	1
1101.31	O-RING - VALVE BODY	1
1203.32	INLET ELBOW - 3/4" MALE BSP	1

Part #	Description	Qty
1204.13	POPPET	1
1219.54	HANDLE COVER - RUBBER	1
1401.07	RIVET	2
1411.02	WASHER	4
1501.13	SEAT	1
1503.11	REGULATOR STEM	1
1507.07	PIN	2
1518.14	BALL	1
1603.68	PLUG - 1/4" BRASS	1
1801.02	ADJUSTMENT KNOB	1
1805.36	BOLT	4
1810.01	BOLT - STAINLESS STEEL	1
GG1500	HIGH PRESSURE GAUGE (OPTIONAL)	1
6062.54	REPAIR KIT (KIT 553)	

■ Parts Included in Repair Kit #6062.54 (KIT 553)

OPERATING INSTRUCTIONS

1. Before operating or re-operating pump, lift R.V. Handle (0902.05) so pump will start at zero pressure.
FAILURE TO DO SO WILL VOID PUMP WARRANTY.
2. Turn Pressure Adjustment Knob (1801.02) counter-clockwise to relieve spring tension. (Step 2 is only necessary on initial start-up and is not necessary for daily operation.)
3. Start unit and let run until air is evacuated from system, when only liquid is expelled from the bypass line.
4. Return R.V. Handle (0902.05) to down position. Open spray gun or spray boom and turn adjustment knob (1801.02) clockwise until desired operating pressure is achieved.

