



# OMEGA 140



Scan this QR Code  
for more information


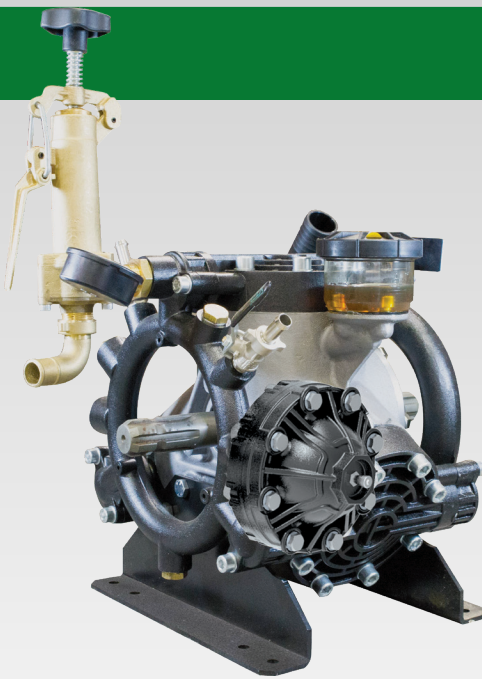


**OMEGA 140** 3-cylinder, high pressure, high volume diaphragm pumps are constructed of anodized aluminum, brass and stainless steel and have anodized aluminum, brass and stainless steel liquid handling parts. Includes mounting rails and 6005.05 control unit with pressure gauge. Simplicity of design and common parts allow for easy and economical maintenance.

**OMEGA 140** pumps are excellent choices for various horticultural and agricultural spraying applications.

## OMEGA 140 TS2C

Model	GPM	l/min	PSI	bar	RPM	Drive Configuration	Weight
<b>OMEGA 140 TS2C</b>	39.0	140	725	50	550	1-3/8" 6-Spline Male PTO Thru-Shaft	88 LBS

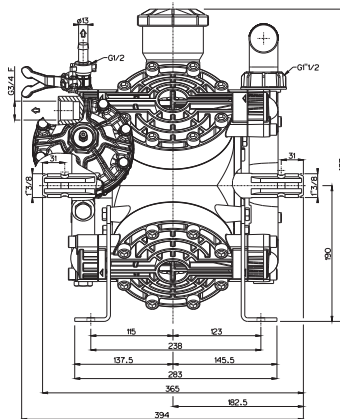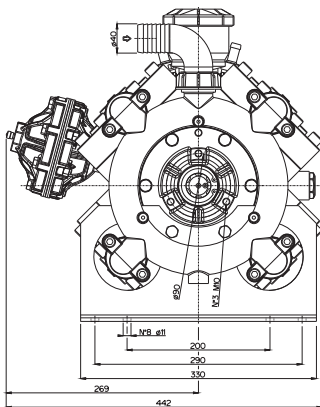

OMEGA 140 TS2C cad. 8449300

Dimensional Drawings are  
Shown in Millimeters.  
To Convert to Inches,  
Multiply Dimension x 0.03937

## Specifications

## OMEGA 140

Inlet Port	1-1/2" Hose Barb
Outlet Ports	(2) 3/4" Hose Barb
Bypass	1" Hose Barb
Dimensions	17.5"L x 14.9"W x 16.0"H
Diaphragm Material	GREENTECH (Standard)

**Lubrication:** Requires 87 oz. of Udor Lube 40W Premium Pump Oil.  
Alternate Oil: 30W non-detergent or 15W-40 non-detergent oil.

## QUICK REFERENCE SERVICE PARTS

Description	Part #
Diaphragm Kit (GREENTECH)	8700.07
Diaphragm Bolt / Washer Kit	6062.36
Valve Kit	6062.E1
Complete Repair Kit	8700.07CK

## Recommended Accessories and Drive Options



**6066.09**  
Shaft Protector  
and Mounting Bolts



**6066.05**  
PTO Drive  
Safety Shield



**6005.05**  
Control Unit  
Regulator



**0016.04**  
Venturi Agitator  
1/2" MNPT Inlet



**UD1-1/2-16**  
1-1/2" HI-Flow Filter  
16 Mesh Screen



**15.5823**  
Udor Lube  
Premium Pump Oil