

- Solid Ceramic Plungers
- Stainless Steel Check Valves
- Stainless Steel Block Manifold with Nickel Plated Valve Covers
- Deeper Back Cover for Increased Oil Capacity
- 34.5 oz. Capacity Vented Oil Bath Crank Case
- 3/4" BSP-F Inlet. 3/8" BSP-F Outlet
- Max Fluid Temp, 160°F




Scan this QR Code for more information

Solid Shaft Models 24mm Keyed Solid Shaft

	Model	Flow		Pressure		Plunger Dia.	Crankshaft		Power	Seal Kit	Valve Kit	Wt.
		GPM	l/min	PSI	bar		Stroke	Code				
1450 RPM	CHC 12/50 S	3.2	12.0	7250	500	15mm	17.0mm	X	15.4 EBHP	6061.88	6061.G1	49 lbs
	CHC 16/50 S	4.2	16.0	7250	500	15mm	22.0mm	1	20.5 EBHP	6061.88	6061.G1	49 lbs
	CHC 20/50 S	5.3	20.0	7250	500	18mm	19.0mm	Y	25.6 EBHP	6061.G2	6061.G1	49 lbs
1750 RPM	CHD 3.0/75 S	3.0	11.5	7250	500	15mm	13.5mm	N	15.0 EBHP	6061.88	6061.G1	49 lbs
	CHD 4.5/75 S	4.2	16.0	7250	500	15mm	19.0mm	YP	20.5 EBHP	6061.88	6061.G1	49 lbs
Rail Kit	8702.08	Standard 7/8" Rail Kit for C Series Solid Shaft Pumps										
	8702.07	Medium 1-3/4" Rail Kit for C Series Solid Shaft Pumps										
	8702.25	Tall 2-1/2" Rail Kit for C Series Solid Shaft Pumps										

NOTE: All pump models available with left-hand drive option. Add 'L' to model number when ordering (ex. CHD 4.5/75 SL)

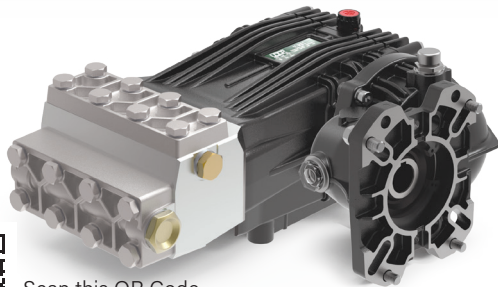

Scan this QR Code for more information

Gear Reduction, Gas Engine Models

1" or 1-1/8" Hollow Shaft, SAE J609-B Flange. 2.2:1 Gear Reduction

	Model	Flow		Pressure		Plunger Dia.	Crankshaft		Power	Seal Kit	Valve Kit	Wt.
		GPM	l/min	PSI	bar		Stroke	Code				
Gear Reduction	CHC 12/50 GR	3.2	12.0	7250	500	15mm	17.0mm	X	20.0 HP Gas	6061.88	6061.G1	59 lbs
	CHC 16/50 GR	4.2	16.0	7250	500	15mm	22.0mm	1	26.0 HP Gas	6061.88	6061.G1	59 lbs
	CHC 20/50 GR	5.3	20.0	7250	500	18mm	19.0mm	Y	34.0 HP Gas	6061.G2	6061.G1	59 lbs

NOTE: All models available with 1" or 1-1/8" Hollow Shafts. Specify size when ordering (ex. CHC 12/50 GR1 or CHC 12/50 GR1-1/8.)

CH Series Dimensional Drawings

Dimensional Drawings are Shown in Millimeters. To Convert to Inches, Multiply Dimension x 0.03937

