


- Brass Manifold
- Heat Treated Crankshaft
- Stainless Steel Piston Guides
- High Strength Aluminum Alloy or Bronze Connecting Rods
- Industrial Quality Ball Bearings and Needle Bearings
- Solid Ceramic Plungers
- Stainless Steel Check Valves
- Heavy Duty Flat Base High Pressure Seals
- Dual Oil Sight Gauges
- 11.5 oz. Capacity Vented Oil Bath Crank Case
- 1/2" BSP-F Inlet. 3/8" BSP-F Outlet
- Max Fluid Temp, 160°F

Some PK Series models are available with unloader valve and injector built into the pump head.  
To order, please follow example: PKNC 13/17 S-V




Scan this QR Code  
for more information



## Solid Shaft Models

### 24mm Keyed Solid Shaft


	Model	Flow		Pressure		Plunger Dia.	Crankshaft		Power	Seal Kit	Valve Kit	Wt.
		GPM	l/min	PSI	bar		Stroke	Code				
1450 RPM	PKC 09/20 S	2.4	9.0	2900	200	15mm	12.5mm	S	4.6 EBHP	6061.07	6061.02	14 lbs
	PKC 10/20 S	2.6	10.0	2900	200	15mm	12.5mm	S	5.1 EBHP	6061.07	6061.02	14 lbs
	PKC 11/17 S	2.9	11.0	2465	170	18mm	10.5mm	O	4.8 EBHP	6061.E2	6061.02	14 lbs
	PKC 13/17 S	3.4	13.0	2465	170	18mm	12.5mm	S	5.7 EBHP	6061.E2	6061.02	14 lbs
	PKC 15/15 S	4.0	15.0	2175	150	18mm	14.0mm	7	5.8 EBHP	6061.E2	6061.02	14 lbs
Rail Kit	8702.10	Standard 7/8" Rail Kit for PN, PK, B & BK Series Solid Shaft Pumps										
NOTE: All pump models available with left-hand drive option. Add 'L' to model number when ordering (ex. PKC 13/17 SL)												

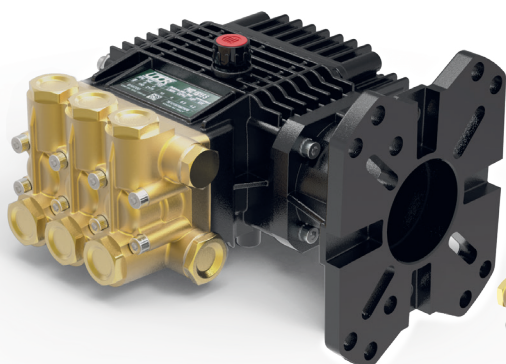

Some PK Series models are available with unloader valve and injector built into the pump head.  
To order, please follow example: PKNL 13/17 W-V



Scan this QR Code  
for more information



- Brass Manifold
- Heat Treated Crankshaft
- Stainless Steel Piston Guides
- High Strength Aluminum Alloy or Bronze Connecting Rods
- Industrial Quality Ball Bearings and Needle Bearings
- Solid Ceramic Plungers
- Stainless Steel Check Valves
- Heavy Duty Flat Base High Pressure Seals
- Dual Oil Sight Gauges
- 11.5 oz. Capacity Vented Oil Bath Crank Case
- 1/2" BSP-F Inlet. 3/8" BSP-F Outlet
- Max Fluid Temp, 160°F


## Direct Drive, Gas Engine Flange Models

### 1" Hollow Shaft, SAE J609-B Flange and Set Screw


	Model	Flow		Pressure		Plunger Dia.	Crankshaft		Power	Seal Kit	Valve Kit	Wt.
		GPM	l/min	PSI	bar		Stroke	Code				
3400 RPM	PKL 3.0/30 W	3.0	11.4	2900	200	15mm	7.5mm	H	8 HP Gas	6061.07	6061.02	16 lbs
	PKL 3.5/30 W	3.5	13.2	2900	200	15mm	9.0mm	M	9 HP Gas	6061.07	6061.02	16 lbs
	PKL 4.0/30 W	4.0	15.0	2900	200	15mm	10.5mm	O	11 HP Gas	6061.07	6061.02	16 lbs
NOTE: All pump models available with left-hand drive option. Add 'L' to model number when ordering (ex. PKL 4.0/30 WL)												



# PK Series

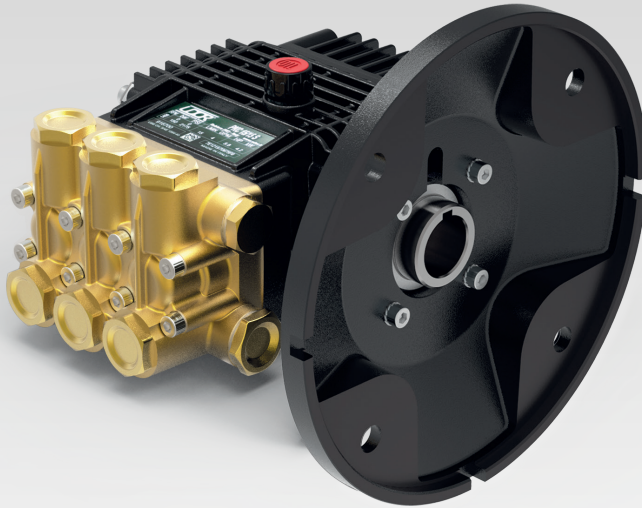

- Brass Manifold
- Heat Treated Crankshaft
- Stainless Steel Piston Guides
- High Strength Aluminum Alloy or Bronze Connecting Rods
- Industrial Quality Ball Bearings and Needle Bearings
- Solid Ceramic Plungers
- Stainless Steel Check Valves
- Heavy Duty Flat Base High Pressure Seals
- Dual Oil Sight Gauges
- 11.5 oz. Capacity Vented Oil Bath Crank Case
- 1/2" BSP-F Inlet. 3/8" BSP-F Outlet
- Max Fluid Temp, 160°F



Some PK Series models are available with unloader valve and injector built into the pump head.  
To order, please follow example: PKNC 13/17 S-V



Scan this QR Code  
for more information

## Direct Drive, Electric Flange Models 1-1/8" Hollow Shaft with NEMA 182/184 TC Mounting Flange

	Model	Flow		Pressure		Plunger Dia.	Crankshaft		Power	Seal Kit	Valve Kit	Wt.
		GPM	l/min	PSI	bar		Stroke	Code				
1750 RPM	PKD 4.0/25 U	4.0	15.0	2465	170	18mm	12.5mm	S	6.5 EBHP	6061.07	6061.02	1 lbs

NOTE: All pump models available with left-hand drive option. Add 'L' to model number when ordering (ex. PKD 4.0/25 UL)

## P Series Dimensional Drawings

