



UDOR[®] **USA**

World Leader in Diaphragm and Plunger Pumps



Sewer Cleaning & Hydro Excavating Applications **Plunger Pumps and Accessories**



Industrial Duty Plunger Pumps


Pumps for Sewer Cleaning & Hydro-Excavating Applications

High-pressure plunger pumps are a critical component to hydro-excavating. They need to perform in a wide range of environments from frozen municipal sewer or water line repairs to soil removal for piling or trench excavation. Equipment builders and operators stake their reputation on system performance. Designed and engineered to handle the toughest applications, UDOT USA offers the pumps and drive options to meet your specific needs.

With features like anodized die-cast aluminum crankcases, heavy duty brass manifolds, heavy duty bronze connecting rods, stainless steel conical valve assemblies, tapered roller bearings, heat treated crank shafts, stainless steel stepped plunger guides for increased seal life, replaceable PTFE coated body guides and high-polished solid ceramic plungers, our pumps will provide the service life you've come to expect from UDOT USA.


Your company depends on providing a quality product that will withstand the harshest conditions. Designed and built in our factory in Italy, UDOT USA's complete line of industrial duty pumps not only meets your needs today, but they provide solutions that help your company grow tomorrow.

NK SERIES ▼

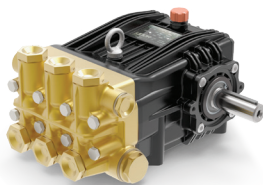


9.1 to 37.8 GPM
Up to 5075 PSI
30mm Solid Keyed Shaft
1450 & 1750 RPM Options

NK-MI SERIES ▼

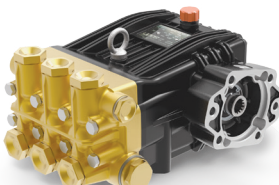


12.5 to 37.8 GPM
Up to 5075 PSI
13T 16/32 DP Hollow Shaft
SAE J744 B Flange
1450 & 1750 RPM Options

PENTA SERIES ▼

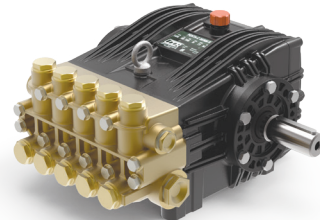


6.6 to 18.8 GPM
Up to 5800 PSI
35mm Solid Keyed Shaft
1000, 1450 & 1750 RPM Options

VX / VXX SERIES ▼

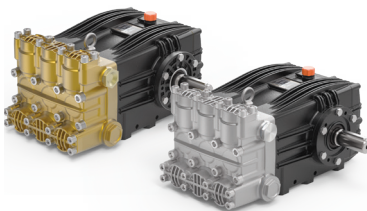


15.9 to 52.8 GPM
Up to 5100 PSI
35mm Solid Keyed Shaft - VX
40mm Solid Keyed Shaft - VXX
1000 RPM

HXR SERIES ▼

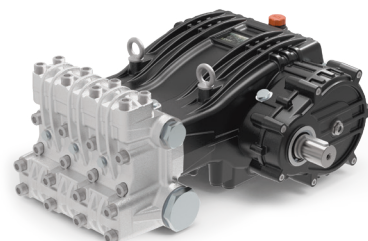


32.9 to 104.4 GPM
Up to 4350 PSI
50mm Male Solid Shaft
1500, 1800 & 2000 RPM Options

VX-MI / VXX-MI SERIES ▼

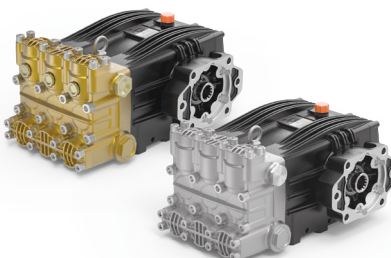

15.9 to 52.8 GPM
Up to 5100 PSI
14T 12/24 DP Hollow Shaft
SAE J744 B Flange
1000 RPM


HXR-MI SERIES ▼

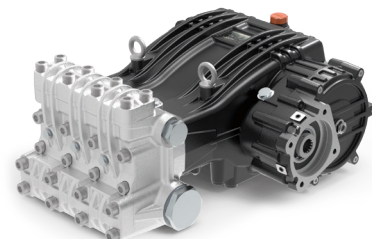

32.9 to 104.4 GPM
Up to 4350 PSI
14T 12/24 DP Hollow Shaft
SAE J744 C Flange
1500, 1800 & 2000 RPM Options




SPRAY GUNS ▼

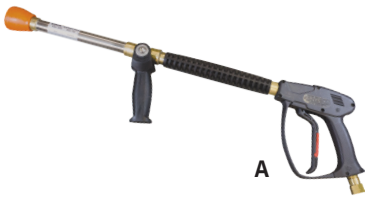

A



B

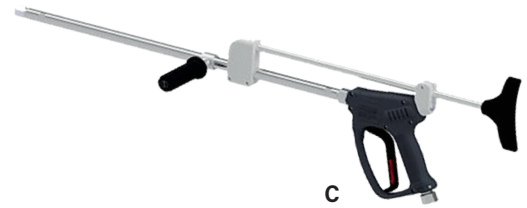

C

	Model	GPM	l/min	PSI	bar	Description
A	22.901.161	10.0	38	3000	200	High Pressure Gun with 21" Barrel. 1.8 mm Orifice
B	22.901.163	25.0	95	3000	200	High Pressure Gun with 21" Barrel. 3.0 mm Orifice
C	1215.50	10.5	40	14500	1000	High Pressure Gun with Lance and Arm Brace.
C	1215.51	10.5	40	18130	1235	High Pressure Gun with Lance and Arm Brace.

BYPASS UNLOADERS ▼



UB600
15.0 GPM @ 8700 PSI
1/2" F Inlet
1/2" F Outlet
3/8" F Bypass



UB1000
10.5 GPM @ 14500 PSI
3/8" F Inlet
3/8" F Outlet
3/8" F Bypass



UB1500
53.0 GPM @ 2200 PSI
1" F Inlet
1" F Outlet
1" F Bypass



UB2000
53.0 GPM @ 4060 PSI
1" F Inlet
1" F Outlet
1" F Bypass



U 450/20
119.0 GPM @ 3000 PSI
1-1/4" F Inlet
1-1/4" F Outlet
1-1/2" F Bypass



U 450/30
119.0 GPM @ 4350 PSI
1-1/4" F Inlet
1-1/4" F Outlet
1-1/2" F Bypass

RELIEF VALVES ▼



SV500
21.0 GPM @ 7250 PSI
1/2" F Inlet
3/8" F Bypass




UB600F
53.0 GPM @ 2610 PSI
3/4" F Inlet
1/2" F Bypass



SV400
119.0 GPM @ 4350 PSI
1-1/4" F Inlet
1-1/4" F Bypass

PUMP PULSATION KIT ▼

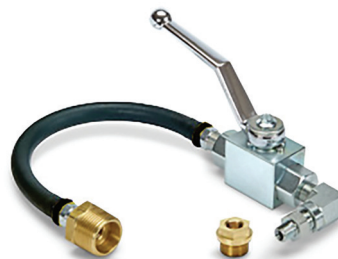

The UDOR USA Pulsation Kit allows a user open or close a ball valve to switch between a pulsating jet or standard high-pressure operation.

When the ball valve is opened, flow from one of the three inlet valves is bypassed back to the pump inlet, eliminating the possibility of dead-heading the pump.

The Pulsation Kit easily mounts to the inlet manifold valve plug on many models for a simple field-retrofit.

INLET FILTERS ▼



POLYPROPYLENE INLET FILTERS

- 1", 1-1/4" and 1-1/2" Models
- 32 Mesh - for Plunger Pump Applications
- 16 Mesh - for Diaphragm Pump Applications

PUMP LUBRICATION ▼





UDOR LUBE / UDOR LUBE SYNTHETIC

SAE 40W non-detergent lubricant. Specially formulated for use in Udor diaphragm & plunger pumps.

- Non-Detergent. Non-Foaming
- Rust Inhibitors
- Anti-wear Agents
- Resists Breakdown Due to Oxidation
- Synthetic Oil Recommended for Cold Weather Uses

Industrial Duty Plunger Pumps

- 1 Anodized Die-Cast Aluminum Crankcase
- 2 Large Diameter Valve Caps with Increased Thread Depth
- 3 Heavy Duty Brass Manifold with Internal and External Bracing
- 4 Stainless Steel Stepped Plunger Guide for Increased Seal Life
- 5 Bottom Mount O-Ring and Back-Up Ring to Prevent Thread Damage
- 6 Stainless Steel Conical Valve Assembly for Increased Efficiency
- 7 High-Polished Solid Ceramic Plungers
- 8 Heavy Duty Bronze Connecting Rods
- 9 Heavy Duty Tapered Roller Bearings
- 10 Deeper Back Cover for Increased Oil Capacity
- 11 Heat Treated Crank Shaft

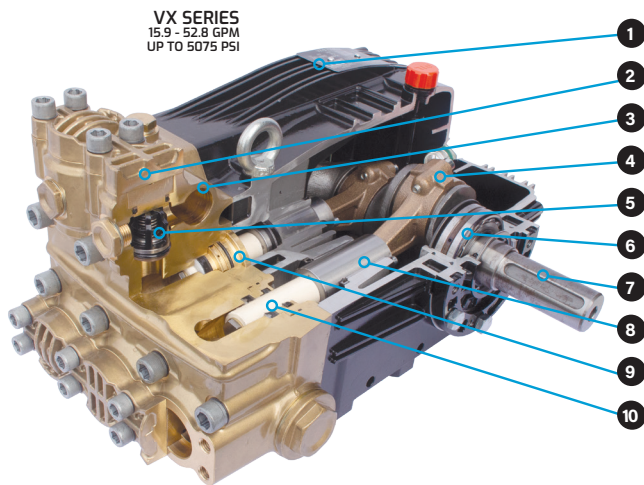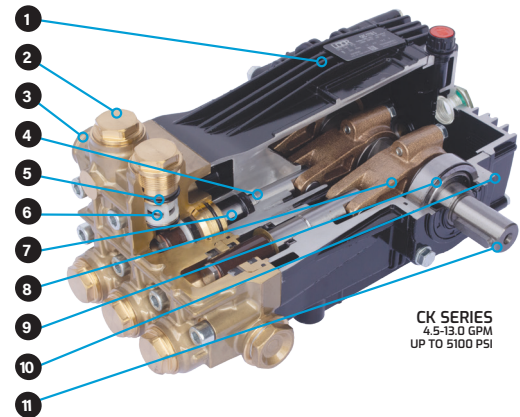

- 1 Anodized Die-Cast Aluminum Crankcase
- 2 Large Diameter Valve Caps with 1-Piece Cover Plate
- 3 Heavy Duty Brass Manifold with Internal and External Bracing
- 4 Heavy Duty Bronze Connecting Rods
- 5 Stainless Steel Conical Valve Assembly for Increased Efficiency
- 6 Heavy Duty Tapered Roller Bearings
- 7 Heat Treated Crank Shaft
- 8 Stainless Steel Stepped Plunger Guide for Increased Seal Life
- 9 Replaceable PTFE Coated Body Guides
- 10 High-Polished Solid Ceramic Plungers

UDOR
USA
World Leader in Diaphragm and Plunger Pumps
An Udor Brand
BOOMINATOR
BOOMLESS SPRAY NOZZLES

6180 140th Avenue NW
Ramsey, MN 55303

Ph: 651-785-0666
Fax: 800-732-2670

www.udorusa.com
www.boominator.com
info@udorusa.com

Scan this QR Code
to Visit www.udorusa.com



**FLYER
SH224A**