




37.901.20 & 37.901.30

High Pressure Adjustable Pattern Foaming Spray Gun

Maximum Flow	- 37.901.20	13.0 GPM / 50 lpm
	- 37.901.30	25.0 GPM / 95 lpm
Maximum Pressure		3000 PSI / 200 bar
Inlet	- 37.901.20	3/8" FNPT
	- 37.901.30	1/2" FNPT
Spray Tip		4.5 mm


Revised 4-26-2024

06-1242.39
SPRAY GUN
REPAIR KIT

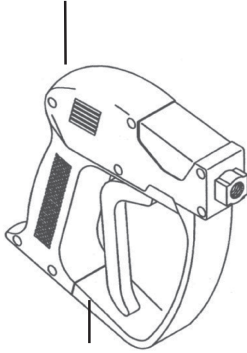


06-1215.31
TRIGGER
SPRAY GUN
37.901.20 ONLY

06-ST-3002/K
SPRAY GUN
REPAIR KIT



06-ST-3002
TRIGGER
SPRAY GUN
37.901.30 ONLY

06-9800.06
1/2" MNPT x
1/4" FNPT ADAPTER
37.901.30 ONLY

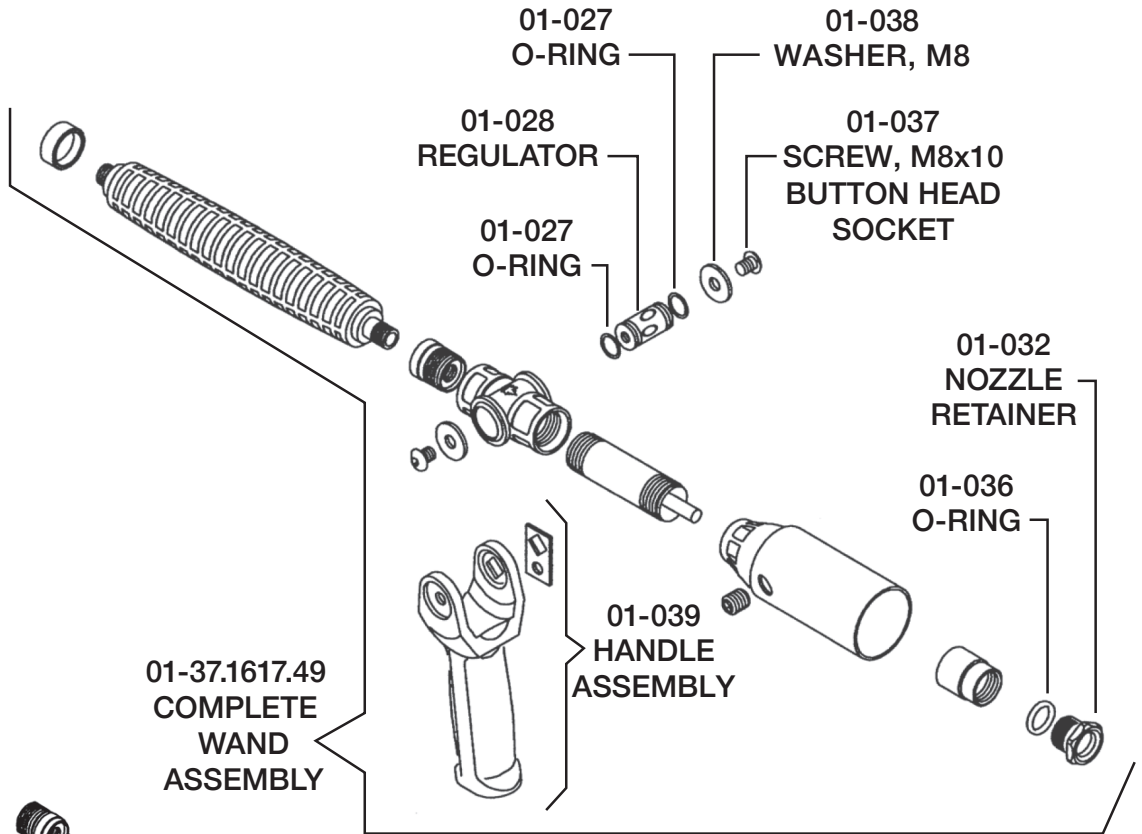

Spray Tip Performance Chart

Model	Orifice (mm)	Material	Gallons per Minute				
			1000 PSI	1500 PSI	2000 PSI	2500 PSI	3000 PSI
68.1802.50	1.2	Ceramic	2.0	2.4	2.6	2.9	3.5
68.1802.51	1.5	Ceramic	2.5	3.0	3.5	3.9	4.4
68.1802.52	1.8	Ceramic	3.5	4.1	4.7	5.3	5.9
68.1802.53	2.0	Ceramic	4.5	5.1	5.8	6.2	6.8
68.1802.54	2.3	Ceramic	6.0	7.0	8.0	9.0	10.0
68.1802.16	2.5	Ceramic	7.5	9.0	10.5	11.5	13.0
68.1802.17	3.0	Ceramic	10.0	12.0	14.0	16.0	18.0
1701.45	3.5	S/S	13.0	16.0	19.0	22.0	36.0