


SPOT SPRAY GUNS




Model	GPM	l/min	PSI	bar	Wand Length	Description
4.802.14	5.0	19	300	20	20"	Poly Trigger Valve. 3/8" Hose Barb Inlet. Adjustable Nozzle
4.802.18	5.0	19	300	20	20"	Poly Trigger Valve. 3/8" Hose Barb Inlet. 11/16" Male Adapter
4.802.24	5.0	19	300	20	28"	Poly Trigger Valve. 3/8" Hose Barb Inlet. Adjustable Nozzle
4.802.20	5.0	19	300	20	28"	Poly Trigger Valve. 3/8" Hose Barb Inlet. 11/16" Male Adapter
4.802.30	5.0	19	300	20	28"	Poly Trigger Valve. 3/8" HB Inlet. Spray Shield. 8002 Nozzle
1238.C1	Spray Shield with 8002 Spray Tip. 14"L x 5"W x 7"H. 1/4" FNPT Inlet.					
8711.03	Repair Kit for 4.802.XX Spray Gun Assemblies					

ROOT FEEDER


UDOR Root Feeder features:

- Nickel-plated trigger valve with 1/2" Female NPT swivel inlet, trigger guard & molded rubber hand grip.
- 3/4" stainless steel tubing with adjustable foot bar.
- Stainless steel 4-hole injector nozzle.
- 42" overall length.

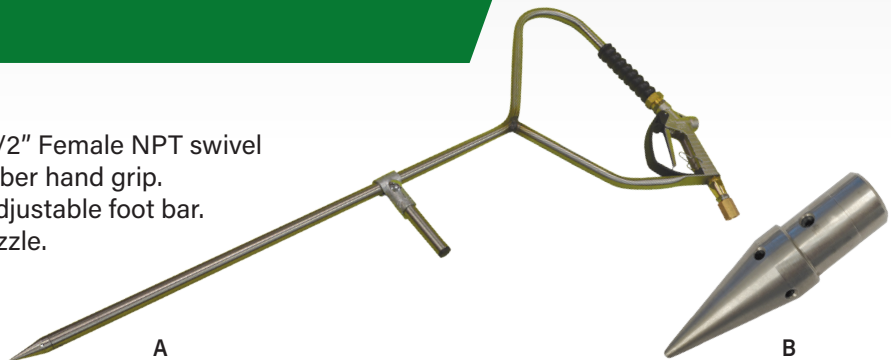

Model	GPM	l/min	PSI	bar	Inlet	Description
A 34.1302.2	20.0	76	450	30	1/2" Female NPT Swivel	Root Feeder. 3/4" SS Tubing. 4-Hole Injector Nozzle
8711.03	Repair Kit for 34.1302.2 Root Feeder					
B 34.1803.26	Replacement Injection Nozzle for Root Feeder					

SPRAY BOOM HINGES



Model	Description
C 6035.02	Spray Boom Hinge. Breakaway Design. Ramp Action Repositioning. Dbl Action Folding. For 1" Sq Tubing
D 6035.18	Spray Boom Hinge. Breakaway Design. Dbl Action Folding. Replacement Hinge for UDOR Spray Booms.