


37.901.20 & 37.901.30

High Pressure Adjustable Pattern Foaming Spray Gun

Maximum Flow	- 37.901.20	13.0 GPM / 50 lpm
	- 37.901.20	25.0 GPM / 95 lpm
Maximum Pressure		3000 PSI / 200 bar
Inlet	- 37.901.20	3/8" FNPT
	- 37.901.30	1/2" FNPT
Spray Tip		4.5 mm


Revised 6-19-2025

1241.17
SPRAY GUN
REPAIR KIT



1215.30
TRIGGER
SPRAY GUN
37.901.20 ONLY


ST-3002/K
SPRAY GUN
REPAIR KIT



ST-3002
TRIGGER
SPRAY GUN
37.901.30 ONLY

19800.06
1/2" MNPT x
1/4" FNPT ADAPTER
37.901.30 ONLY

0802.51
COMPLETE
WAND
ASSEMBLY

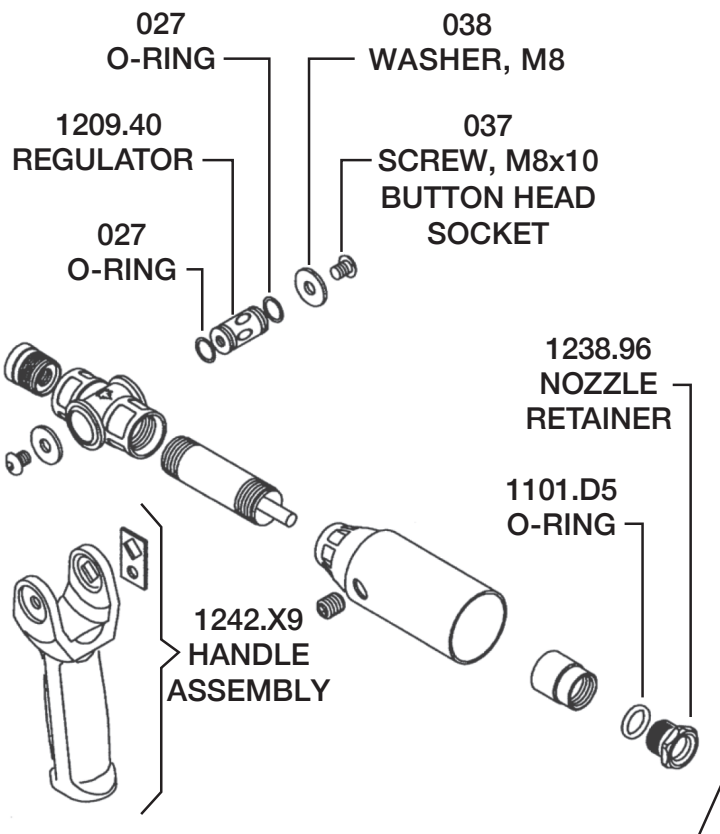

Spray Tip Performance Chart

Model	Orifice (mm)	Material	Gallons per Minute				
			1000 PSI	1500 PSI	2000 PSI	2500 PSI	3000 PSI
1701.29	1.2	Ceramic	2.0	2.4	2.6	2.9	3.5
1701.30	1.5	Ceramic	2.5	3.0	3.5	3.9	4.4
1701.53	1.8	Ceramic	3.5	4.1	4.7	5.3	5.9
1701.31	2.0	Ceramic	4.5	5.1	5.8	6.2	6.8
1701.32	2.3	Ceramic	6.0	7.0	8.0	9.0	10.0
1701.33	2.5	Ceramic	7.5	9.0	10.5	11.5	13.0
1701.26	3.0	Ceramic	10.0	12.0	14.0	16.0	18.0
1701.45	3.5	S/S	13.0	16.0	19.0	22.0	36.0