




- Brass Manifold
- Heat Treated Crankshaft
- Stainless Steel Piston Guides
- High Strength Aluminum Alloy Connecting Rods
- Industrial Quality Bearings
- Solid Ceramic Plungers
- Stainless Steel Check Valves
- Heavy Duty Flat Base High Pressure Seals
- 11.5 oz. Capacity Vented Oil Bath Crank Case
- 1/2" BSP-F Inlet. 3/8" BSP-F Outlet
- Max Fluid Temp, 160°F

Solid Shaft Models

24mm Keyed Solid Shaft

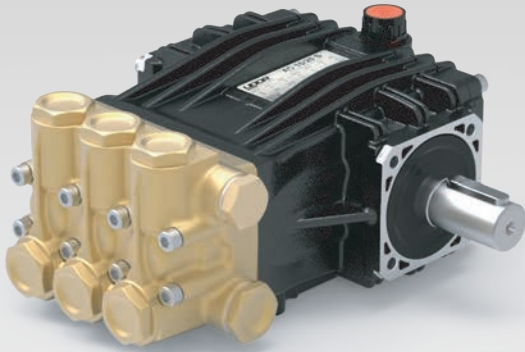

Scan this QR Code
for more information

	Model	Flow		Pressure		Plunger Dia.	Crankshaft		Power	Seal Kit	Valve Kit	Wt.
		GPM	l/min	PSI	bar		Stroke	Code				
1450 RPM	AKC 09/25 S	2.4	9.0	3625	250	15mm	12.5mm	S	5.6 EBHP	6061.07	6061.02	15 lbs
	AKC 10/25 S	2.6	10.0	3625	250	15mm	14.0mm	7	6.3 EBHP	6061.07	6061.02	15 lbs
	AKC 11/25 S	2.9	11.0	3625	250	18mm	10.5mm	O	7.0 EBHP	6061.E2	6061.02	15 lbs
	AKC 12/25 S	3.2	12.0	3625	250	18mm	11.5mm	R	7.7 EBHP	6061.E2	6061.02	15 lbs
	AKC 14/25 S	3.7	14.0	3625	250	18mm	12.5mm	S	8.6 EBHP	6061.E2	6061.02	15 lbs
	AKC 15/25 S	4.0	15.0	3625	250	18mm	14.0mm	7	9.8 EBHP	6061.E2	6061.02	15 lbs
1750 RPM	AKD 3.0/36 S	3.2	12.0	3625	250	15mm	14.0mm	7	7.9 EBHP	6061.07	6061.02	15 lbs
	AKD 3.5/36 S	3.5	13.2	3625	250	18mm	10.5mm	O	8.5 EBHP	6061.E2	6061.02	15 lbs
	AKD 4.0/36 S	4.0	15.0	3625	250	18mm	12.5mm	S	10.5 EBHP	6061.E2	6061.02	15 lbs

Rail Kit

8702.10

Standard 7/8" Rail Kit for PN, A, AK, B & BK Series Solid Shaft Pumps

NOTE: All pump models available with left-hand drive option. Add 'L' to model number when ordering (ex. AC 11/20 SL)



Scan this QR Code
for more information





Direct Drive, Gas Engine Flange Models

3/4" Hollow Shaft, SAE J609-A Flange and Set Screw

	Model	Flow		Pressure		Plunger Dia.	Crankshaft		Power	Seal Kit	Valve Kit	Wt.
		GPM	l/min	PSI	bar		Stroke	Code				
3400 RPM	AKL 3.0/36 T	3.0	11.4	3625	250	15mm	7.0mm	G	9.5 HP Gas	6061.07	6061.02	15.4 lbs

NOTE: All pump models available with left-hand drive option. Add 'L' to model number when ordering (ex. AKL 3.0/36 TL)

AK Series Dimensional Drawings





Scan this QR Code
for more information

Direct Drive, Gas Engine Flange Models

1" Hollow Shaft, SAE J609-B Flange and Set Screw

	Model	Flow		Pressure		Plunger Dia.	Crankshaft		Power	Seal Kit	Valve Kit	Wt.
		GPM	l/min	PSI	bar		Stroke	Code				
3400 RPM	AKL 3.0/40 W	3.0	11.4	4000	280	15mm	10.5mm	O	9.5 HP Gas	6061.07	6061.02	15.4 lbs
	AKL 3.5/40 W	3.5	13.2	4000	280	15mm	9.0mm	M	11 HP Gas	6061.07	6061.02	15.4 lbs
	AKL 4.0/40 W	4.0	15.0	4000	280	15mm	10.0mm	5	13 HP Gas	6061.07	6061.02	15.4 lbs

NOTE: All pump models available with left-hand drive option. Add 'L' to model number when ordering (ex. AKL 4.0/36 WL)



Scan this QR Code
for more information

Direct Drive, Electric Flange Models

1-1/8" Hollow Shaft with NEMA 182/184 TC Mounting Flange

	Model	Flow		Pressure		Plunger Dia.	Crankshaft		Power	Seal Kit	Valve Kit	Wt.
		GPM	l/min	PSI	bar		Stroke	Code				
1750 RPM	AKD 4.0/36 U	4.0	15.0	3625	250	18mm	12.5mm	S	10.1 EBHP	6061.B2	6061.02	17.6 lbs

NOTE: All pump models available with left-hand drive option. Add 'L' to model number when ordering (ex. AKD 4.0/36 UL)









Scan this QR Code
for more information

Direct Drive, Hydraulic Flange Models

3/4" Hollow Shaft with 2 Bolt A-Flange Hydraulic Motor Mount

	Model	Flow		Pressure		Plunger Dia.	Crankshaft		Power	Seal Kit	Valve Kit	Wt.
		GPM	l/min	PSI	bar		Stroke	Code				
1450 RPM	AKC 14/20 Z MI	3.7	14.0	3625	250	18mm	13.0mm	T	9.0 EBHP	6061.B2	6061.02	17.6 lbs

AK Series Dimensional Drawings



Dimensional Drawings are
Shown in Millimeters.
To Convert to Inches,
Multiply Dimension x 0.03937