



Scan this QR Code
for more information

- Stainless Steel Manifold
- Solid Ceramic Plungers
- Stainless Steel Check Valves
- Heavy Duty Bronze Connecting Rods
- Heavy Duty Roller Bearings
- 1/2" BSP-F Inlet. 1/2" BSP-F Outlet
- 128 oz. Oil Capacity
- Max Fluid Temp, 160°F



VYY Series Plunger Pumps

40 mm Solid Keyed Shaft

	Model	Flow		Pressure		Plunger Dia.	Crankshaft		Power	Seal Kit	Valve Kit	Wt.
		GPM	l/min	PSI	bar		Stroke	Code				
1000 RPM	VYY-B 20/1500 R	5.0	18.9	21800	1500	14mm	45.0mm	2	73.0 EBHP	6860.01	6920.01	143 lbs
1200 RPM	VYY-F 25/1250 R	6.0	22.6	18130	1250	14mm	45.0mm	2	73.0 EBHP	6860.01	6920.01	143 lbs
	VYY-F 23/1500 R	5.7	21.7	21800	1500	14mm	42.0mm	8	83.6 EBHP	6860.01	6920.01	143 lbs

NOTE: All pump models available with left-hand drive option. Substitute 'L' for 'R' in model number when ordering (ex. VY-C 15/1000 L)

Dimensional Drawings

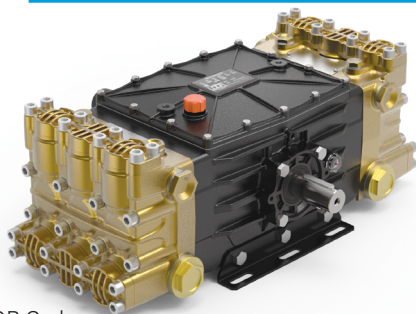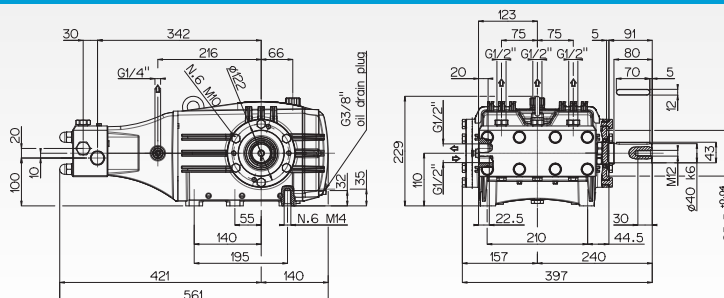

Scan this QR Code
for more information

- Anodized Aluminum Crank Case
- Nickel-Plated Manifold
- Stainless Steel Check Valves
- Heavy Duty Bronze Connecting Rods
- Heavy Duty Roller Bearings
- 1-1/2" BSP-F Inlet. 1" BSP-F Outlet
- 65 oz. Oil Capacity
- Max Fluid Temp, 160°F

VX6 Series Plunger Pumps

35 mm Solid Shaft x 1-3/8" 6 Spline PTO Thru Shaft

	Model	Flow		Pressure		Plunger Dia.	Crankshaft		Power	Seal Kit	Valve Kit	Wt.
		GPM	l/min	PSI	bar		Stroke	Code				
800 RPM	VX6-A 260/60 TS 1C	68.7	260.0	870	60	55mm	24.0mm	N	42.0 EBHP	6061.Z5	6061.Z6	198 lbs
	VX6-A 330/50 TS 1C	87.0	329.3	725	50	55mm	30.4mm	L	44.3 EBHP	6061.Z5	6061.Z6	198 lbs
	VX6-A 410/40 TS 1C	108.8	411.7	580	40	55mm	38.0mm	V	44.3 EBHP	6061.Z5	6061.Z6	198 lbs

Dimensional Drawings

