




Scan this QR Code
for more information

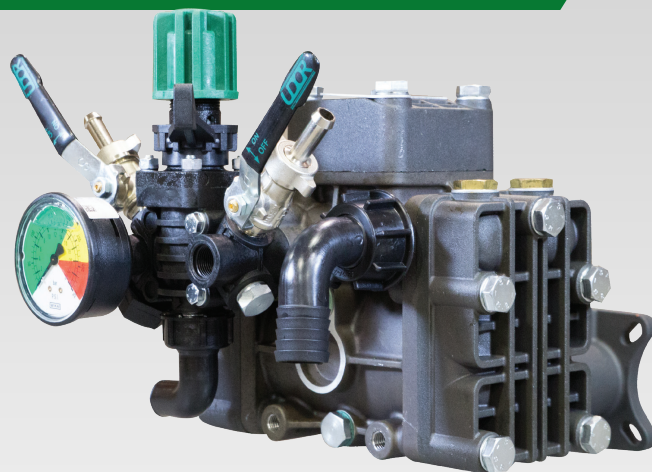


GREENTECH Diaphragms Standard. Buna-N Optional.

KAPPA 25 2-cylinder, medium pressure diaphragm pumps are internally manifolded with anodized aluminum construction and anodized aluminum and stainless steel liquid handling parts.

KAPPA 25 pumps are excellent choices for various horticultural, agricultural, lawn care, nursery, pest control and turf spraying applications. They are also effectively used for aircraft de-icing, hydrostatic testing and cleaning applications.



KAPPA 25



KAPPA 25 GR3/4

Model	GPM	l/min	PSI	bar	RPM	Drive Configuration	Weight
KAPPA 25	7.0	26.5	350	24	550	25 mm Solid Keyed Shaft. Mounting Rails	18 LBS
KAPPA 25 GR3/4	7.0	26.5	350	24	550	Gear Reduction for 3/4" Shaft Gas Engine, 4-6.5 HP	28 LBS

Specifications


KAPPA 25

Inlet Port	1" Hose Barb
Outlet Ports	(2) 1/2" Hose Barb
Bypass	3/4" Hose Barb
Piston Diameter	55mm
Crankshaft Stroke/Code	10.0mm / I
Dimensions	8.5"L x 9.0"W x 9.5"H

Lubrication: Requires 12 oz. of Udor Lube 40W Premium Pump Oil.
Alternate Oil: 30W non-detergent or 15W-40 non-detergent oil.

QUICK REFERENCE SERVICE PARTS

Description	Part #
Diaphragm Kit (GREENTECH)	6062.C1
Diaphragm Bolt/Washer Kit	6062.B4
Valve Kit	6062.42
Regulator Repair Kit	6062.A9
Complete Repair Kit	8700.65CK

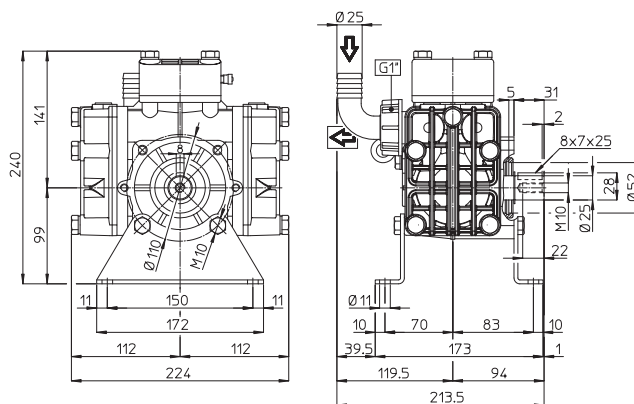

Dimensional Drawings are
Shown in Millimeters.
To Convert to Inches,
Multiply Dimension x 0.03937

Recommended Accessories and Drive Options



6010.95

Control Unit
Regulator w/Gauge



5085.F7

Gear Reduction
3/4" Shaft Gas Engine



0016.04

Venturi Agitator
1/2" MNPT Inlet



163.604.4
163.604.6

3/8" & 1/2" HB Elbow



UD1-16

1" HI-Flow Filter
16 Mesh Screen



15.5823

Udor Lube
Premium Pump Oil